


|                       |             |
|-----------------------|-------------|
| <b>CATALOG NUMBER</b> | <b>TYPE</b> |
| <b>PROJECT</b>        |             |

**4" LINE VOLTAGE DOWNLIGHTS**

**R-432**

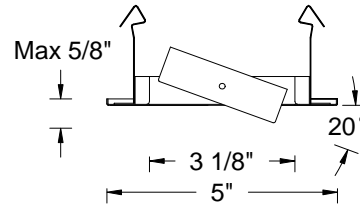

| Ordering Matrix |       |              |
|-----------------|-------|--------------|
| Series          | Model | Finish(Trim) |
| [ ]             | [ ]   | [ ]          |
| R               | 432   | BN BZ WT     |

Ordering Example (series – model number – finish): R-432-BN

| Product Details  | Specification Features   |
|--|--|
| <p><b>Description:</b> Recessed trim with adjustable gimbal ring. For use with R-4XX series Line voltage downlights.</p> <p><b>Materials:</b> Durable stamped metal construction. Fingered retention clips firmly hold trim to housing.</p> <p><b>Lamping</b> Utilizes medium base incandescent lamps. Incandescent lamps are rated for up to 50W watts max. Lamps are ordered separately.</p> <p><b>Finish:</b> Abrasion resistant powder coat painted or plated metal finish. Trim and gimbal ring are available in Brushed Nickel (BN), Bronze(BZ) or White.</p> <p><b>Listing:</b> UL &amp; CUL Listed. Suitable for damp locations.</p> | <ul style="list-style-type: none"> <li>• Handles surfaces up to 1"</li> <li>• 20° adjustment from vertical.</li> <li>• 5 year W.A.C. Lighting product warranty.</li> </ul> |

| Compatible Housings(Sold separately)   |  |   |  |
|--|--|---|--|
| <p><b>R-400S-N-A</b></p> <p>NON-IC Rated. Air tight. New Construction 50W PAR20;</p> |  | <p><b>R-401S-R-A</b></p> <p>NON-IC Rated. Air tight. Remodel housing 50W PAR20;</p> |  |
| <p><b>R-402S-N-ICA</b></p> <p>IC Rated. Air tight. New Construction 50W PAR20;</p>   |  |   |  |