

1-Circuit Track

Power Feeds

Catalog No. _____

Type _____

Project _____

General Track Information


Power feeds are constructed of sturdy polycarbonate with galvanized steel back plates. Every electrical component is polarized and has a grounding capability to ensure safe usage. Visual polarity indicators simplify proper electrical installation. Twelve gauge insulated wire is used for internal connections. Solid copper track contacts provide good electrical conductivity for years of trouble free operation.

All track components are cULus listed except for LA-5 and LA-6. Installations are suitable for dry locations only. Maximum power rating is 2400 Watts: 20A at 120V, 60Hz. NEC allows 80% of full capacity or 1920 Watts.

Polarity-Configuration Legend



1-Circuit Track Power Feeds




2-Wire Cord & Plug Feed



LA-5-(B, P)

- 18 Gauge 14' End Feed Cord, 10A Max., Optional 6A/125V switch, cut-out in cover for cord, **not UL Listed**.




Outlet Box Feed Kit



LA-9-(B, P, S)

- Square Cover Plate With End Feed. (1) 1/2" K.O. Kit includes J-Box Mounting Bracket, Threaded Nipple And Nut.




3-Wire Cord & Plug Feed




LA-6-(B, P)

- 18 Gauge 14' End Feed Cord, 10 Amps Max., grounded plug and connections, cut-out in cover for cord, **not UL Listed**.



Top Access End Feed




LA-10-(B, P, S)


- Power Feed. (1) 1/2" top K.O. for standard electrical conduit.

LA-10A-(B, P, S)

- Reverse Polarity Power Feed. (1) 1/2" top K.O. for standard electrical conduit.




Floating Feed Point



LA-7-(B, P, S)

- Can be installed anywhere along track. Kit includes square J-Box Canopy Cover, J-Box Mounting Bracket, Track Adaptor, and one LA-11 Series End Cap.




T-Bar End Feed




LA-20-(B, P)

- Ceiling End Feed has 4-1/8" square canopy cover. (3) 1/2" top K.O.'s can be used with T-grid installations.



Surface Conduit End Feed



LA-8-(B, P, S)

- End Feed. (1) 1/2" top K.O. and (1) 1/2" end K.O. for surface conduit.

LA-8A-(B, P, S)

- Reverse Polarity End Feed. (1) 1/2" top K.O. and (1) 1/2" end K.O. for surface conduit.



1-Circuit Track

Power Feeds


Catalog No. _____

Type _____

Project _____

Sample System Installations

Line Up Polarity Arrows with Grooves, Insert Connectors Into Track Sections to Assemble Components

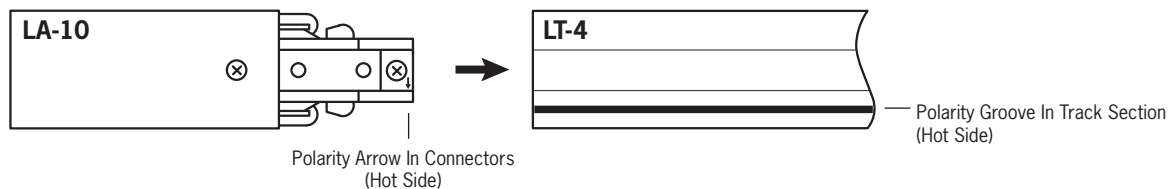

Sample Layouts with Polarity

Floor View of Track on Ceiling
All Straight Sections are LT Series Track

Dot = Connector Polarity Arrow Location
Shaded Area = Hot Side Of Connector/Track Section

