


**OUTDOOR • LED IN-GROUND RECESSED ACCENT LIGHTING**  
**HG-GL16S-12V**

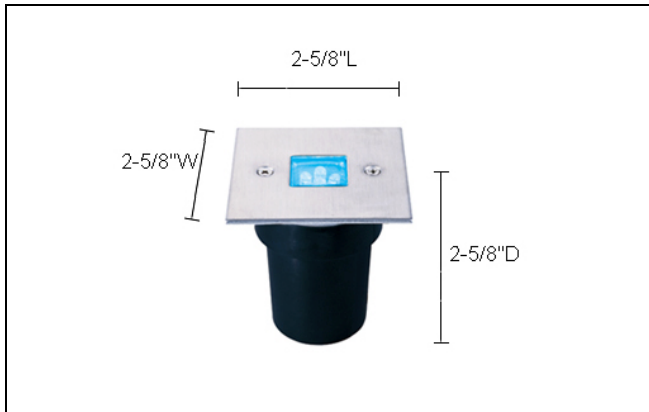

**SPECIFICATIONS**

<b>Location Rating</b>	Outdoor
<b>Trim</b>	Stainless Steel 2-5/8" Square
<b>Housing</b>	ABS Plastic 2-5/8" D
<b>Cut-Out</b>	1-15/16"Ø
<b>LED Lamps Used</b>	6 Lamps (0.06 W each)
<b>Total Wattage</b>	0.36 W
<b>Operating Voltage</b>	12V DC
<b>Light Output</b>	33 lm/W
<b>Beam Angle</b>	20°
<b>Average Operating Life</b>	30,000 hours – 30, 60, G, B 50,000 hours – R, Y
<b>Weight</b>	0.75 Lbs
<b>Carton Size</b>	3" x 3" x 3"

**ORDERING INSTRUCTIONS**

**Example:** MODEL – VOLTAGE – COLOR OUTPUT  
 HG-GL16S – 12V – 30

**DESCRIPTION**

- In-ground accents for garden lighting.
- In steps, porches and decks for accents.
- Pathway lighting along steps and driveways.
- Excellent for both decorative patterning and for night-time safety and security.

**LISTING:**  
 C-UL Listed.

**INSTALLATION**

To install in wood or plastics: screw-in holes in housing provided. To install in cement, stone, brick, wood or plastics: use silicon Glues on flange underside. Can be installed in-ground directly – just dig hole and fill around housing. Can be installed in: walls, fences, cabinetry, furnishings, ceilings, floors (only 1/8" thick trim thickness – route in wood if necessary 1/8").

**COLOR OUTPUT**

R – Red	627nm = 26 lm/W
G – Green	530nm = 32 lm/W
B – Blue	470nm = 11 lm/W
Y – Yellow	590nm = 21 lm/W
30 – Warm White	3000K = 27 lm/W
60 – Cool White	6000K = 33 lm/W

**ACCESSORIES**

**TRANSFORMERS**


TRANS12W-OD	LED Driver 12W
TRANS36W-OD	LED Driver 36W
TRANS60W-OD	LED Driver 60W

**HARNESSES**

HARNES2-OD	2-Light Harness
HARNES3-OD	3-Light Harness
HARNES5-OD	5-Light Harness
HARNES7-OD	7-Light Harness

**CONNECTING CABLES**

CONNECT1-24-OD	24" Plug-in Connecting Cable
CONNECT1-36-OD	36" Plug-in Connecting Cable

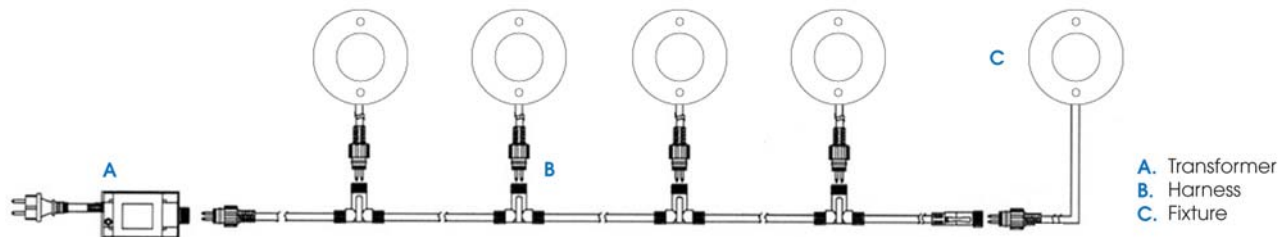

**SUBMITTAL**

<b>Job Name:</b>	<b>Date:</b>
<b>Specification Type:</b>	<b>Job Location:</b>
<b>Drawing Location of Fixture Type:</b>	<b>Approval:</b>
<b>Specifier Name:</b>	<b>Sales Agency Contact:</b>
<b>Contact Phone/Email:</b>	<b>Contact Phone/Email:</b>



**JESCO**  
 LIGHTING GROUP

**JESCO LIGHTING GROUP**  
 6625 TRAFFIC AVE  
 GLENDALE, NY 11385

800.527.7796  
 WWW.JESCOLIGHTING.COM  
 WWW.JESCOLED.COM


Specifications subject to change without prior notice.

**OUTDOOR • LED IN-GROUND RECESSED ACCENT LIGHTING**  
**HG-GL16S-12V**


**ACCESSORIES – HARNESES**




**HARNESS2-OD:**  
 2-Light Harness  
 92" Plug-in lead 18AWG IP65 with waterproof connectors.  
 Fixture Spacing: 46"; Lead: 46"




**HARNESS3-OD:**  
 3-Light Harness  
 125" Plug-in lead 18AWG IP65 with waterproof connectors.  
 Fixture Spacing: 34"; Lead: 57"



**HARNESS5-OD:**  
 5-Light Harness  
 190" Plug-in lead 18AWG IP65 with waterproof connectors.  
 Fixture Spacing: 38"; Lead: 38"



**HARNESS7-OD:**  
 7-Light Harness  
 259" Plug-in lead 18AWG IP65 with waterproof connectors.  
 Fixture Spacing: 37"; Lead: 37"



**ACCESSORIES – TRANSFORMERS**



**TRANS12W-OD:**  
 12V Transformer with 72" power cord. Powers up to 12 watts.  
 Extension Lead: 33"



**TRANS36W-OD:**  
 12V Transformer with 72" power cord. Powers up to 36 watts.  
 Extension Lead: 33"



**TRANS60W-OD:**  
 12V Transformer with 72" power cord. Powers up to 60 watts.  
 Extension Lead: 33"




**ACCESSORIES – CONNECTING CABLES**



**CONNECT2-24-OD**  
 22" Plug-in Connecting Cable 18AWG IP65



**CONNECT2-36-OD**  
 33" Plug-in Connecting Cable 18AWG IP65



**SUBMITTAL**

<b>Job Name:</b>	<b>Date:</b>
<b>Specification Type:</b>	<b>Job Location:</b>
<b>Drawing Location of Fixture Type:</b>	<b>Approval:</b>
<b>Specifier Name:</b>	<b>Sales Agency Contact:</b>
<b>Contact Phone/Email:</b>	<b>Contact Phone/Email:</b>



**JESCO**  
 LIGHTING GROUP

**JESCO LIGHTING GROUP**  
 6625 TRAFFIC AVE  
 GLENDALE, NY 11385

800.527.7796  
 WWW.JESCOLIGHTING.COM  
 WWW.JESCOLED.COM

Specifications subject to  
 change without prior notice.