


# EX2HRLEDEM EX2HGLEDEM

LED Exit/  
Emergency Light  
Combination  
with Battery Back-Up

Catalog #

Type

Project

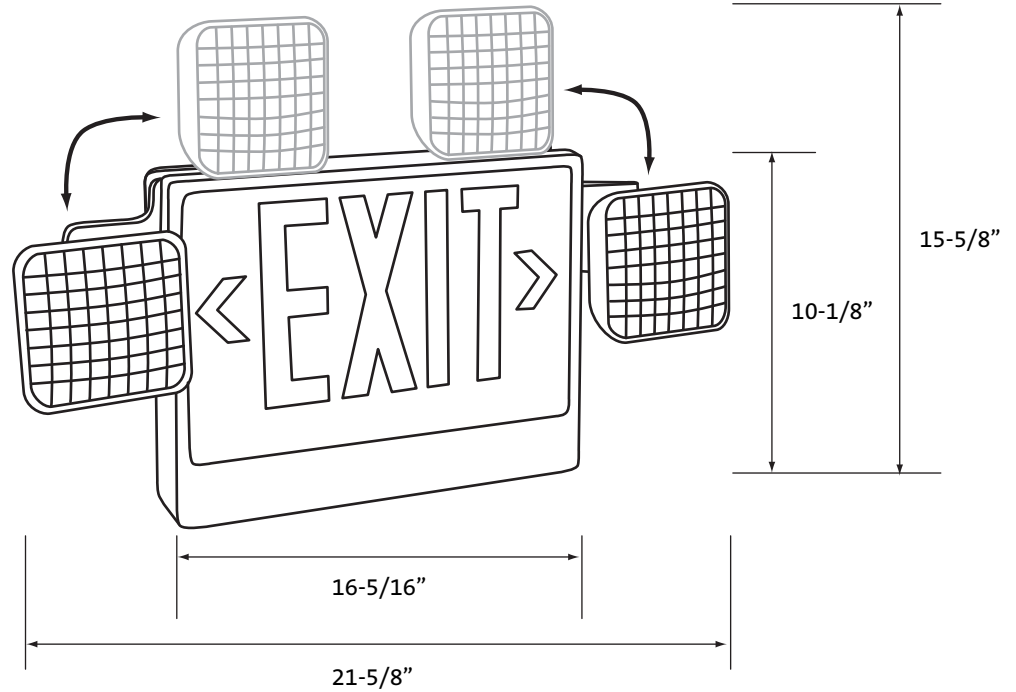

## Specifications/Features

### Housing

Injection molded thermoplastic housing.  
UL 94V-0 flame rating.  
Innovative, snap-together design allows for fast installation.  
Replaceable directional chevron inserts are easily removed and reinserted.  
Letters are 6" high with a 3/4" stroke.  
Single or double face configuration.  
Two fully adjustable glare-free square shape light heads for emergency light.

### Mounting

Wall or ceiling mount.  
Simple twist and lock action tightly secures housing to canopy.

### Electrical

120/277 VAC dual voltage operation.  
Low energy consumption - only 3.8 watts at normal (120V) operation, 15 watts at emergency operation.  
LED indicator light and push button test switch.  
LEDs mounted on print circuit board (for Exit sign).  
LED lamps operate in normal (AC input) and emergency (DC input) modes.  
2 x 6V 5.4 watts DC T5 wedge base lamps for emergency mode.  
Lead-Calcium battery (6V 4.5Ah) delivers minimum 90 minute discharge.  
Low voltage battery disconnection prevents deep discharge damage to the battery.

### Warranty

This fixture is covered by Con-Tech's one year full replacement guarantee after date of purchase.

### Listing

cULus listed.

## Ordering Information

Example Order:  -

Fixture

EX2HRLEDEM - Red LED Exit Combo with Battery Back-up  
EX2HGLEDEM - Green LED Exit Combo with Battery Back-up

Finish

B - Black  
P - White

