


# EXOHRLEDEM EXOHGLEDEM

LED  
Exit Sign with  
Battery Back-up

Catalog # \_\_\_\_\_

Type \_\_\_\_\_

Project \_\_\_\_\_

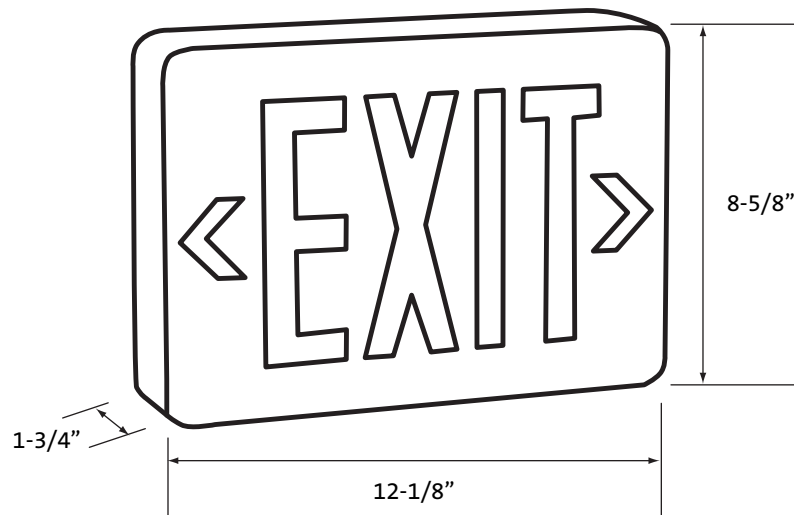

## Specifications/Features

### Housing

Injection-molded thermoplastic housing.  
UL 94V-0 flame rating.  
Innovative, snap-together design allows for fast installation.  
Replaceable directional chevron inserts are easily removed and reinserted.  
Letters are 6" in height with a 3/4" stroke.  
Single or double face configuration.

### Mounting

Universal (wall, side or ceiling) mounting.  
Simple twist and lock action tightly secures housing to canopy.

### Electrical

120/277 VAC dual voltage operation.  
Low energy consumption - only 2.4 watts at 120V.  
LED indicator light and push button test switch.  
LEDs mounted on print circuit board.

LED lamps operate in normal (AC input) and emergency (DC input) modes.  
Nickel-Cadmium battery (4.8V 650 mA) delivers more than 3 hours capacity to emergency lamps.  
24-hour recharge after 90 minute discharge.  
Low voltage battery disconnection prevents deep discharge damage to the battery.

### Warranty

This fixture is covered by Con-Tech's one year full replacement guarantee after installation.

### Listing

ULus listed.

## Ordering Information

Example Order:  -

Fixture

EXOHRLEDEM - Red LED Exit Sign  
EXOHGLEDEM - Green LED Exit Sign

Finish

B - Black Housing  
P - White Housing



1-800-728-0312

www.con-techlighting.com

All specifications subject to change without notice.