


LED FLEXBRITE KITS

LED Flexbrite Kits, available in both *Cool White* and *Ultra Warm White*, interconnect without the use of tools making them a convenient choice for quick installations. **LED Flexbrite Kits** last 3 to 5 times longer (up to 100,000 hours average life) than incandescent rope and do not build up heat. This linear lighting product uses the highest grade PVC available with a newly developed UV inhibitor to help ensure its longevity. **LED Flexbrite Kits**, packaged for retail display, include attached power cord and end cap (these are removable for interconnecting multiples) and mounting clips (one per foot of Flexbrite). Track is recommended for straight line installations.




FEATURES

- Indoor/Outdoor rated
- LED Flexbrite kits include: Flexbrite, pre-connected (removable) five foot power cord, removable end cap and one mounting clip per foot of Flexbrite
- Kits are easily extendable up to 240 feet – attach two kits together (no tools required)
- Produces virtually no heat for maximum safety
- Highest quality PVC with UV inhibitor to maximize life

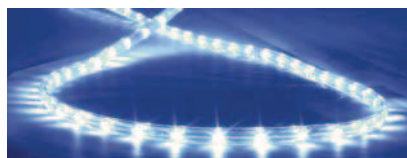

ACCENT LIGHTING COVE LIGHTING DECORATIVE LIGHTING BUILDING OUTLINES
ARCHITECTURAL DETAILS BOOKSHELVES PATIOS, DECKS & GAZEBOS

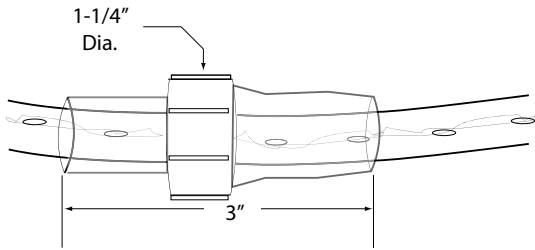

Interconnection of two kits

BILL OF MATERIALS

- Determine length needed to the nearest multiple of 3 feet, up to 240 feet
- Order kits in like sizes where possible
- Order mounting track for straight runs (recommended); clips are included with kits

ORDERING INFORMATION

KITS

LR-LED	—	—	—
LED Flexbrite			
		CW = Cool White	3 = 3 feet
		UWW = Ultra Warm White	9 = 9 feet
			15 = 15 feet
			30 = 30 feet
			75 = 75 feet
			150 = 150 feet

RETAIL ACCESSORIES FOR KITS

LR	—	—
		LED-EXT3
		CLIP-20
		RL-TRK-3

OPTIONAL

DL	—	—
		CLIP/SCREW TRACK-4

ACCESSORIES

-		LR-LED-EXT3	Three foot jumper for Flexbrite kits only, white wire; includes two power connectors
-		LR-CLIP-20	Blister pack of twenty clear mounting clips with screws
-		RL-TRK-3	Three foot clear mounting track sold in case quantities of 40 only!
-		DL-CLIP/SCREW	Clear "U" shaped mounting clip that securely holds rope light in place
-		DL-TRACK-4	Four foot clear mounting track with UV rating for outdoors; recommended for use with straight line installations

TECHNICAL SPECIFICATIONS

Voltage	120V, 60Hz AC operation
Construction	Heat resistant clear PVC housing with LEDs every 1", vertical mount
Dimensions	1/2" diameter
Cuttability	N/A
Wattage	0.77 watt per foot
Maximum run	150 feet
Switching	Provide switched outlet for On/Off and dimming control
Linking	Interconnect kits with no additional parts or use LR-LED-EXT3 jumper for connecting two sections together
Packaging	Retail blister pack for 3', 9' and 15' kits; retail box for 30', 75' and 150' kits
LED specs	60,000 hours average LED life
Dimmers	Dimmable with most standard incandescent, low voltage magnetic and low voltage electronic dimmers



P

