


ORDERING INFORMATION

PRODUCT





LED Thirty Bulk
BK = Black
NK = Nickel
WH = White

KITS



LED Thirty Kit
BK = Black
WH = White

REQUIRED



BK = Black
WH = White

OPTIONAL





BK = Black
NK = Brushed Steel
WH = White

BILL OF MATERIALS

- Determine total number of LED Thirty puck lights to be used for the application
- For less than three, order pucks in bulk and one LPTR transformer
- If you need three, order a kit, no additional accessories are required
- For more than three, consider combining kits and bulk to complete your sets; or if one driver is preferred, order pucks in bulk and one LED-DR-12, for up to sixteen pucks
- Optional trim rings available for recessed installations

Bill of materials for a four light system:

- (4) LP30-BK
- (1) LED-DR-12
- (4) LPT-NK

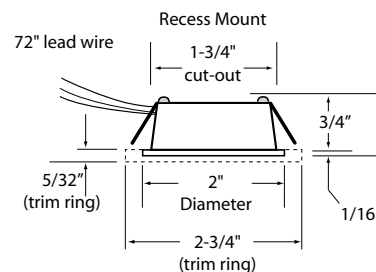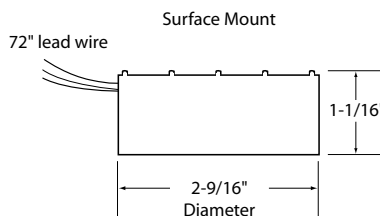

ACCESSORIES

pg 124		LED-DR-12	Hardwire 12V DC LED driver, 25 watts maximum (up to sixteen LP30s), c/UL/us Recognized
pg 124		LPTR5-BK LPTR5-WH	Plug-in 12V DC power supply for LED Thirty pucks. 5 watt maximum (up to three LP30s), 24" 18-gauge lead wire with connector block, 6-foot power cord with inline roll switch and mounting hardware. Available in Black and White , c/UL/us
-		LPT-BK LPT-NK LPT-WH	Decorative trim ring; snaps onto recessed LED Thirty pucks to add a more finished look. Available in Black and White (plastic); and Nickel (steel) 5/32"H x 2-3/4" Dia.

TECHNICAL SPECIFICATIONS

Voltage	12V DC operation using parallel wiring configuration
Construction	Thermal plastic housing and surface ring; steel spring clips
Dimensions	H = 1-1/16" (surface mounted), H = 1/32" (recessed profile), Dia = 2-9/16" (surface mounted), Dia = 2" (recessed)
Lead wires	72" length, 18AWG with stripped leads
Switching	Use roll switch on power supply's cord or locate switched outlet/switch leg to control On/Off functions
Cut-out	1-3/4" hole size for recessed mounting
Wattage	1.5 watts
Maximum run	Do not connect more than three puck lights to the LPTR-5 power supply; do not connect more than sixteen pucks to the LED-DR-12
Packaging	Four color retail box with hang tab for kits (offered in Black and White); White box for bulk units
Power supply	12V DC power supply is included with retail kits. See ACCESSORIES when ordering bulk pucks
LED specs	60,000 hour rated life, thirty 1mm non-replaceable LEDs, .05 watts each, 3000°K, 80 CRI, beam angle is 97°
Dimmers	Not dimmable
Diffuser	Clear integrated plastic lens cover



P/H