


# ROPE LIGHT KITS

**Rope Light Kits** provide a quick and convenient solution to code compliance challenges. Choose between commercial grade, packaged in a white box, and premium grade, packaged for retail display. Various multi purpose lengths of Clear **Rope Light** interconnect without the use of tools to create custom lengths. Economical and dimmable, this linear lighting product uses the highest grade PVC available with a newly developed UV inhibitor to help ensure its longevity. **Rope Light Kits** include attached power cord and end cap (these are removable for interconnecting multiples) and mounting clips (one per foot). Track is recommended for straight line installations.

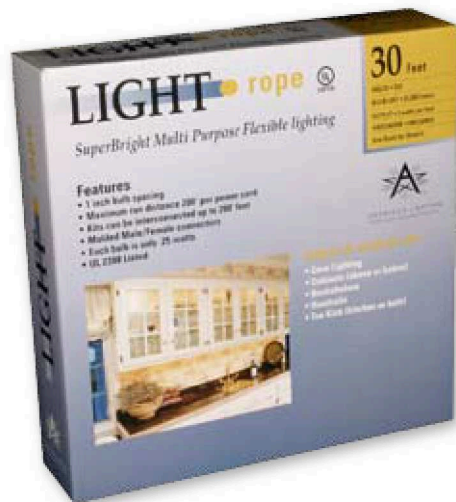


## FEATURES

- Indoor/Outdoor rated
- Dimmable
- Rope Light Kits include: Clear Rope Light, pre-connected (removable) five foot power cord, removable end cap and one mounting clip per foot
- Kits are easily extendable up to 240 feet for premium grade; up to 150 feet for commercial grade
- Quickly attach two kits together without the use of tools
- Highest quality PVC with UV inhibitor to maximize life

## BILL OF MATERIALS

- Determine length needed to the nearest 24" increment
- Order kits in lengths to match target length
- Order mounting track for straight runs (recommended); clips are included with kits (one per foot of rope)

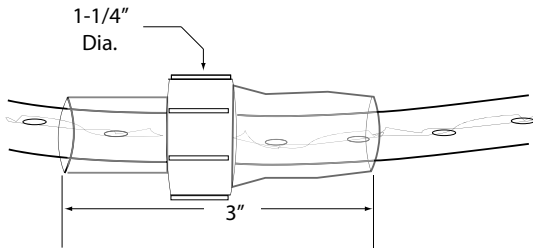

Interconnection of two kits

## ORDERING INFORMATION

### COMMERCIAL GRADE

**042-CL** —

**Clear**     2 = 2 feet  
**120V**    6 = 6 feet  
**Boxed**    10 = 10 feet  
               18 = 18 feet  
               30 = 30 feet  
               50 = 50 feet

### PREMIUM GRADE

**018** —

**Clear**     0001 = 2 feet  
**120V**    0002 = 6 feet  
**Retail**    0003 = 10 feet  
**Packs**    0004 = 18 feet  
               0005 = 30 feet  
               0006 = 50 feet

### RETAIL ACCESSORIES

**ULRL-EXT3**

**LR-CLIP-20**

**RL-TRK-3**

### OPTIONAL

**DL** —

**CLIP/SCREW  
TRACK-4**

## ACCESSORIES

-		ULRL-EXT-3	Three foot jumper for Rope Light Kits, white wire; includes two power connectors, blister pack
-		DL-CLIP/SCREW	Clear "U" shaped mounting clip that securely holds rope light in place
-		RL-TRK-3	Three foot clear mounting track <b>Sold in case quantities of 40 only!</b>
-		DL-TRACK-4	Four foot clear mounting track with UV rating for outdoors; recommended for use with straight line installations

## TECHNICAL SPECIFICATIONS

Voltage	120V, 60Hz AC operation
Construction	UV resistant clear PVC housing with incandescent lamps spaced every 1.09", vertical mount
Dimensions	1/2" diameter
Wattage	5.0 watts per foot for commercial grade; 3.0 watts per foot for premium grade
Maximum run	150 feet for commercial grade; 240 feet for premium grade
Switching	Provide switched outlet for On/Off and dimming control
Linking	Interconnect kits with no additional parts or use ULRL-EXT-3 jumper for connecting two sections together
Packaging	White box for commercial grade; retail blister pack or retail box for premium grade
Lamp specs	25,000 hour rated life; 6.5V, 70mA, 1.09" lamp spacing for commercial grade; 5V, 60mA, 1" lamp spacing for premium grade
Dimmers	Dimmable with most standard incandescent dimmers
Diffuser	Clear PVC jacket



P

