

**RXEL30 — Exit / Emergency Light**




**Operation:**

The LED exit sign is constantly illuminated by normal AC power. Whenever normal AC current fails, the internal solid state transfer switch automatically connects the internal battery to the LED lamps to keep the exit sign continuously lit for 90 minutes. At the same time, backup battery power is also supplied to the two lamp heads, lighting a path of egress for no less than 90 minutes. When AC power is restored, the battery is recharged by the onboard solid state charger and is accomplished within 24 hours.

- RXEL30GB-E** Green Letters with Black Housing
- RXEL30GW-E** Green Letters with White Housing
- RXEL30RB-E** Red Letters with Black Housing
- RXEL30RW-E** Red Letters with White Housing

**Features:**

- Two fully adjustable 7W heads.
- Single or Double face.
- Compact, low profile design.
- Energy consumption of 2 watts for red letters and 1 watt for green letters.
- 25 years LED lamp life.
- Universal mounting canopy for wall or top installation.
- Quick installation prismatic louvered downlight.
- Flame retardant, high-impact thermoplastic housing.
- Universal snap-in and out chevron design meets all new state and local codes (UL924)
- 120/277V
- Moving swing arm unit.
- ETL listed.
- Limited 5-year warranty.
- Completely self-contained.
- Backed by Lead-Calcium battery and Ni-Cad battery.
- Operating temperature range: 14° F (-10° C) to 104° F (40° C)
- Damp location listed

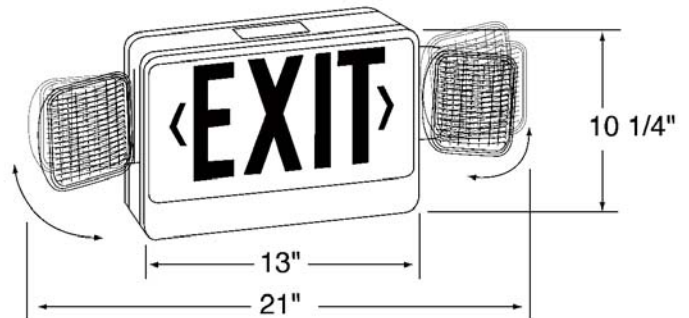

Project:
Contact:
Location:
Fixture Type:

Quantity	Remarks