

**RXL21 / RXL22 — Die Cast Aluminum LED Edge Lit Exit Signs**



- RXL21GA LED Green Letters
- RXL21GA-SD LED Green Letters-Self Diagnostic
- RXL21RA LED Red Letters
- RXL21RA-SD LED Red Letters-Self Diagnostic
- RXL22GA LED Red Letters
- RXL22GA-SD LED Red Letters –Self Diagnostic
- RXL22RA LED Red Letters
- RXL22RA-SD LED Red Letters –Self Diagnostic

**Features:**



- Die Cast Aluminum Housing
- RXL21—Single Face
- RXL22—Double Face
- Compact low profile design.
- Less than 5 watts energy consumption.
- Completely self contained.
- Nickel-Cadmium battery backup.
- Test switch and AC indicator light.
- Removable directional indicators.
- 120V / 277V.
- Tri-Mount universal canopy.
- UL / ETL listed for damp location.
- Operating temperature range: 14° F (-10° C) to 104° F (40° C)
- Limited 5 year warranty

**Self-Diagnostic Features**

- Monitor Battery Disconnection, charger failure, lamp failure, and transformer fault at every 5 seconds without discharging battery or illuminating lamps.
- Automatically indicates lamp, battery and charger status by dual-color LED lamp.
- Used dual color LED lamp to minimize space for LED lamp on the fixture.
- Factory preset - does not need field adjustment.
- Integrated function - Fire alarm (6V) function is integrated in Self-Diagnostic option.

**Automatic Test**

- Verifies battery disconnection, charger failure, lamps failure, and transformer failure at every 5 seconds
- One minute self-testing every month.
- 30 minutes self-testing on the 6th month of the year.
- 90 minutes self-testing on the 12th month of the year.

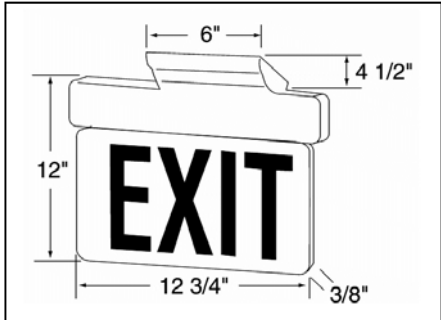

Project:
Contact:
Location:
Fixture Type:

Quantity	Remarks