

### Features


- ADA compliant
- Acrylic
- Left or right drain
- Nylon grab bars (-N), grey bars supplied with white and biscuit modules, white bars supplied with others
- Brushed stainless steel grab bars (-C)
- Polished stainless steel grab bars (-P)
- Removable, multi-position seat
- Molded-in floor pattern
- 57" (144.8 cm) x 36-5/8" (93 cm) x 80-1/2" (204.5 cm) inside finished dimensions
- 64-3/4" (164.5 cm) x 37" (94 cm) x 84" (213.4 cm) rough-in dimensions

### ONE-PIECE ACRYLIC BATH AND SHOWER MODULE

# K-12103

## ALSO K-12104

ADA

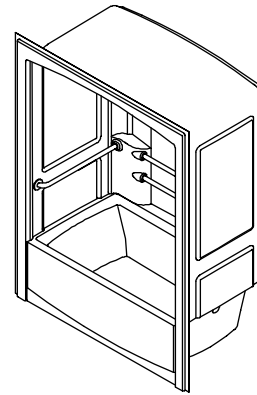

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1
- ADA
- CABO/ANSI A117.1
- IAPMO/UPC
- Listed in State of Massachusetts

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-12103-N	Module with drain on left, nylon grab bars	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-12103-C	Module with drain on left, brushed stainless steel grab bars	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-12103-P	Module with drain on left, polished stainless steel grab bars	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-12104-N	Module with drain on right, nylon grab bars	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-12104-C	Module with drain on right, brushed stainless steel grab bars	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-12104-P	Module with drain on right, polished stainless steel grab bars	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
<b>Accessories</b>				
K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-1665	Dome light	<input type="checkbox"/> CP	<input type="checkbox"/> G	

### Product Specification:

The one-piece bath and shower module inside finished dimensions shall be 57" (144.8 cm) in length, 36-5/8" (93 cm) in width, and 80-1/2" (204.5) in height. Module shall be ADA compliant. Module rough-in dimensions shall be 64-3/4" (164.5 cm) in length, 37" (94 cm) in width, and 84" (213.4 cm) in height. Module shall be made of acrylic. Module shall have a drain on either the left or the right. Module shall have integral soap ledges. Module shall have nylon grab bars (-N), (grey bars supplied with White and Biscuit modules, White bars supplied with others). Module shall have brushed stainless steel grab bars (-C). Module shall have polished stainless steel grab bars (-P). Module shall have a removable, multi-position seat. Module shall have a molded-in floor pattern. Module shall be Kohler Model K-\_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_.

# FREEWILL™

## Technical Information

Fixture:*	basin area	top area	weight
Bathing well	44" (111.8 cm) x 23" (58.4 cm)	51" (129.5 cm) x 26" (66 cm)	200 lbs. (90.7 kg)
	water depth	capacity	
To overflow	13" (33 cm)	55 gal. (208 L)	
Configuration		1-piece	
Drain outlet		2-1/4" D. (5.7 cm)	
* Approximate measurements for comparison only.			

## Installation Notes

Install this product according to the installation guide.

For optimum accessibility, specify faucets and fittings to install and operate within the control area shown.

The fixture is not drilled for supply fittings.

Shimming may be required to level fixture.





Stud opening tolerance is + 1/4" (6 mm), - 0" (0 cm).


When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.

Some shimming between stud frame and fixture may be required.

Provide clear floor space per ICC/ANSI A117.1 and as shown.

This unit will comply with the Americans with Disabilities Act when installed according to the requirements of the Accessibility Guidelines, Section 4.21 Shower Stalls, of the Act.

*Recess opening must be 65" (165.1 cm) x 84-1/4" (214 cm).	
No change in measurements if connected with drain illustrated. (K-7161-AF)	
	Represents control area for faucets.
	Represents 24" (61 cm) wall mount slide bar.
 36" (91.4 cm) 60" (152.4 cm)	Represents clear floor space for 36" (91.4 cm) x 60" (152.4 cm) side entrance.
 48" (121.9 cm) 60" (152.4 cm)	Represents clear floor space for 48" (121.9 cm) x 60" (152.4 cm) front entrance.

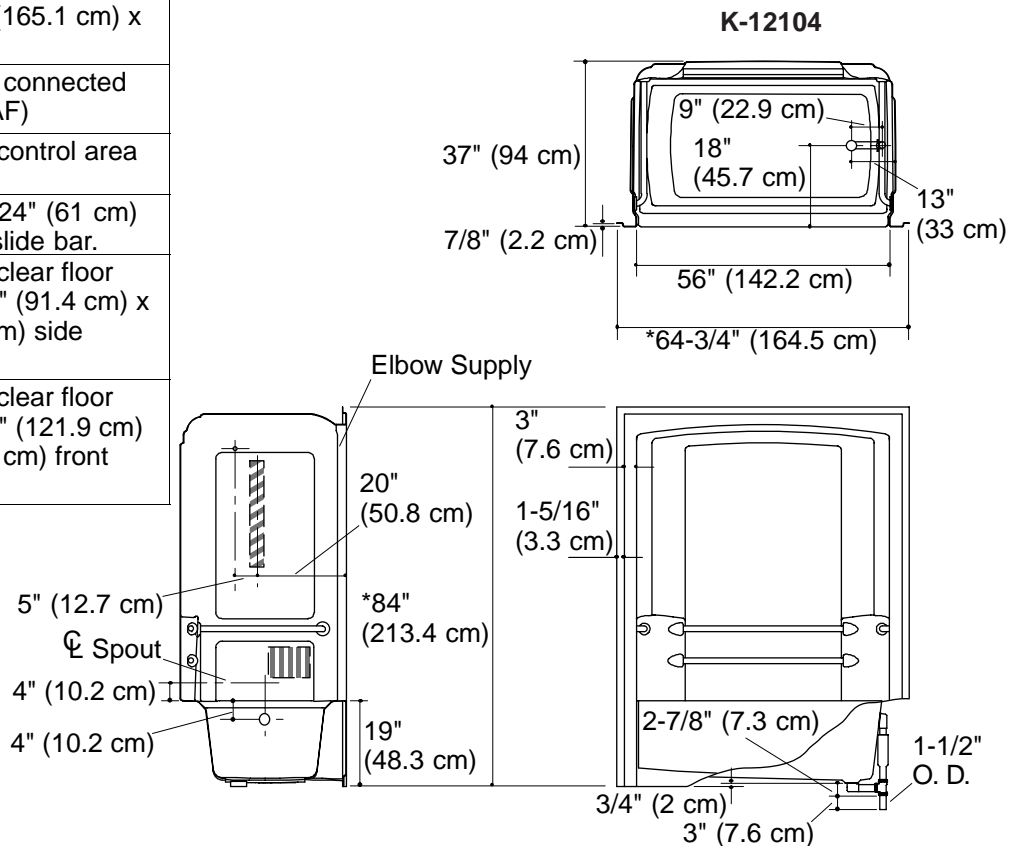

## Product Diagram