

# Trims for 4" Low Voltage Recessed Housings

Catalog No. \_\_\_\_\_

Type \_\_\_\_\_

Project \_\_\_\_\_


All trims are compatible with **4" Low Voltage Recessed Housings** (LVR16 and LVR1675 Series).

Max. Lamp: (1) 20 - 50W MR16 lamp, GU5.3 base unless noted.

On fixtures designed for use with standard MR16 lamps, Con-Tech provides a clear tempered safety lens. If use of MR16 with front glass is required, remove the factory provided clear tempered safety lens.

All trims have white trim finish unless specified.

All trims are cULus listed and are suitable for damp locations; only shower trims are listed for wet locations.



*Baffled Downlight\**

**Standard Trim, 5-1/2" O.D.**

**CTR1601-B**

Adjustable Black Baffle, Black Trim Ring

**CTR1601-P**

Adjustable Black Baffle

**CTR1601-P-WHT**

Adjustable White Baffle

**Narrow Trim, 4-15/16" O.D.**

**CTR1601N-B**

Adjustable Black Baffle, Black Trim Ring

**CTR1601N-P**

Adjustable Black Baffle

**CTR1601N-P-WHT**

Adjustable White Baffle

**Cast Aluminum Trim, 5-1/8" O.D.**

**CTR1601-PA**

Adjustable Black Baffle

**CTR1601-PA-WHT**


Adjustable White Baffle

**CTR1601-BA**

Black Baffle, Black Cast Aluminum Trim Ring

Deep baffle traps stray light and conceals lamp. May be used as downlight or adjustable accent light with 60° swing adjustment. May be used with multiple light controlling elements, 50mm lens.

75W lamp may be used with LVR1675-TH and LVR1675-TR housings.



*Multiplier\**

**Standard Trim, 5-1/2" O.D.**

**CTR1602-P-**

**(BLK, CLR, GLD, PL, WHT)**

Adjustable Multiplier, White Trim Ring, Select Reflector Finish

**CTR1602-B-BLK**

Adjustable Multiplier, Black Trim Ring, Black Reflector

**CTR1602-(ST, NK)-CLR**

Adjustable Multiplier, Select Metal Trim Finish, Clear Reflector

**Narrow Trim, 4-15/16" O.D.**

**CTR1602N-P-(BLK, CLR, GLD, WHT)**

Adjustable Multiplier, White Trim Ring, Select Reflector Finish

**CTR1602N-B-BLK**


Adjustable Multiplier, Black Trim Ring, Black Reflector

**Cast Aluminum Trim, 5-1/8" O.D.**

**CTR1601-PA-(BLK, CLR, WHT)**

Utilizes a highly polished, specular reflector to maximize light intensity while concealing the light source. Offers the flexibility to be used as a downlight or adjustable accent light with 35° swing adjustment. May be used with multiple light controlling elements, 50mm lens.

75W lamp may be used with LVR1675-TH and LVR1675-TR housings.



*Slotted Wall Wash*

**Standard Trim, 5-1/2" O.D.**

**CTR1603-P**

**Narrow Trim, 4-15/16" O.D.**


**CTR1603N-P**

**Cast Aluminum Trim, 5-1/8" O.D.**

**CTR1603-PA**

Slot aperture permits maximum beam area adjustment for either wall wash or concealed accent lighting effects. 50° swing adjustment, 358° rotation. 50mm lens.

75W lamp may be used with LVR1675-TH and LVR1675-TR housings.




**CTR1606-(B, P)**

Surface Adjustable

45° max. vertical and 359° rotational aiming. Die-cast aluminum construction. 50mm lens. Front access for re-lamping.

**\*NOTE:** These trims use a stepped lens holder design. Insert 45mm lens on lower level of adjustable lamp seat, install 50mm lens on higher position.

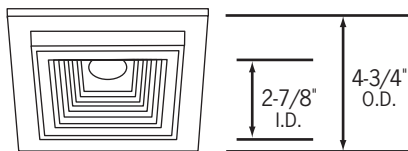


**CTR1604-P**

Black Baffled Square

Deep baffle traps stray light and conceals light source. Downlight or adjustable-up to 35° vertical adjustment. 50mm lens.

75W lamp may be used with LVR1675-TH and LVR1675-TR housings.

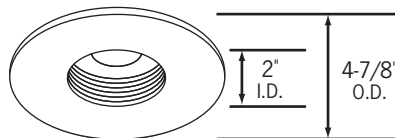


**CTR1605-P**

Black Baffled Pin Spot

**CTR1605-P-WHT**

White Baffled Pin Spot

Precise beam spread and unobtrusive appearance. Concealed lamp design for maximum eye comfort. Deep baffle. Will hold (2) lenses or louvers, (1) 47mm size on the bottom, (1) 50mm size on the top.

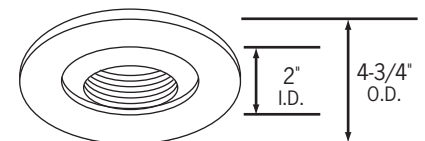

**CTR1607-(B, C, P)**

Adjustable Pin Spot, Black Baffle\*

**CTR1607-P-WHT**


Adjustable Pin Spot, Black Baffle\*

Low profile gimbal design for aiming flexibility. 35° swing adjustment. 50mm lens.

75W lamp may be used with LVR1675-TH and LVR1675-TR housings.




# Trims for 4" Low Voltage Recessed Housings, Con't.

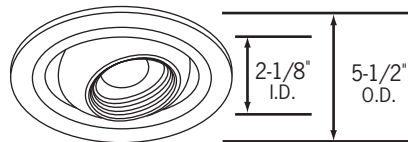

### CTR1608-P

Black Baffled Eyeball  
45° vertical aiming, 358° rotational adjustment. Black baffle provides excellent cutoff and lamp concealment. 50mm lens.  
75W lamp may be used with LVR1675-TH and LVR1675-TR housings.

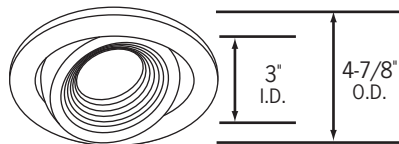


### CTR1609-P

Surface Adjustable, Cast Black Baffle

### CTR1609-P-WHT

Surface Adjustable, Cast White Baffle  
Low glare baffle. May be used as a downlight or adjustable accent light with up to 35° vertical and 358° rotational adjustment. 50mm lens.

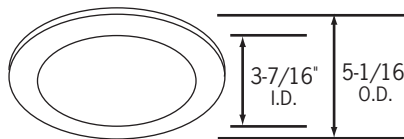


### CTR1611FR-(NK, P, ST)

Flat Frosted Glass Shower Light

### CTR1611CL-(NK, P, ST)

Flat Clear Glass Shower Light

Die cast aluminum. Double neoprene gasketed. Clear specular reflector. cULus listed for wet locations.

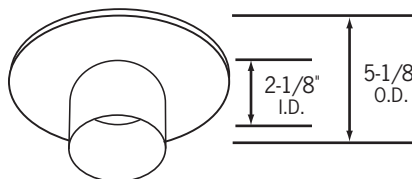


### CTR1621B-(NK, P)

Blue Glass Cylinder

### CTR1621F-(NK, P)

Frosted Glass Cylinder

Cylindrical glass diffuser with specular reflector focuses light downward and eliminates glare. Depth From Ceiling: 2"

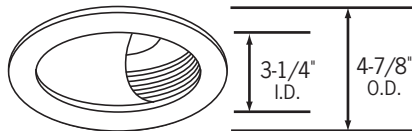


### CTR1613-P

Black Baffled Scoop Wall Wash, 50mm Lens


### CTR1613-P-WHT

White Baffled Scoop Wall Wash, 50mm Lens

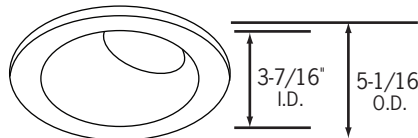


### CTR1614-P-CLR

Clear Reflector Angled Wall Wash  
Adjustable lampholder; 55-75° aiming angle. 45mm lens.

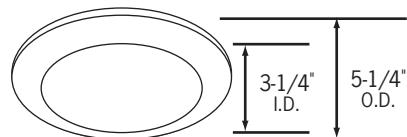

### CTR1616FR-(NK, P, ST)

Convex Frosted Glass Shower Light  
Die cast aluminum. Double neoprene gasketed. Clear specular reflector. cULus listed for wet locations. Depth From Ceiling: 3/4"

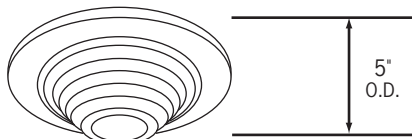

### CTR1618-B-P

Blue Compressed Glass

### CTR1618-F-P

Frosted Compressed Glass

Full lamp concealment. Must use front glass MR16 lamp. 1-1/2" inner diameter.




### CTR1624-(B, C, CO, NK, P, PB, ST)\*\*

Fully Adjustable Square in Round  
87° vertical and 359° rotation adjustment. Die-cast aluminum construction. Front access, spring latch lamp retainer ring (black finish). 47mm lens. Depth from ceiling: 2-1/2"

Catalog No. \_\_\_\_\_


Type \_\_\_\_\_

Project \_\_\_\_\_

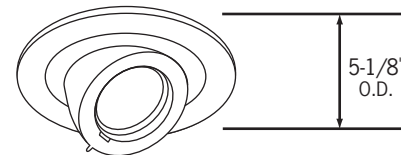


### CTR1625-(B, NK, P)\*\*

Fully Adjustable Round/Round  
87° vertical and 359° rotation adjustment. Die-cast aluminum construction. Front access, spring latch lamp retainer ring (black finish). 47mm lens. Depth From Ceiling: 2-1/2"

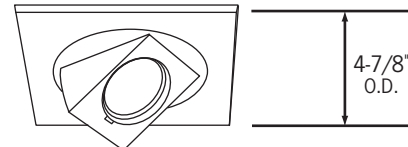

### CTR1629-(B, NK, P)\*\*

Fully Adjustable Square/Square  
87° vertical and 359° rotation adjustment. Die-cast aluminum construction. Front access, spring latch lamp retainer ring (black finish). 47mm lens. Depth From Ceiling: 2-5/8"

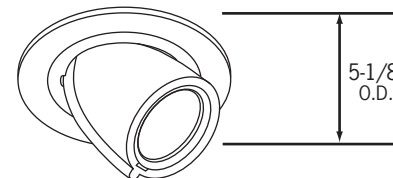

### CTR1635-(B, C, NK, P)\*\*

Fully Adjustable Round/Round  
87° vertical and 359° rotation adjustment. Die-cast aluminum construction. Front access, spring latch lamp retainer ring (black finish). 47mm lens. Depth From Ceiling: 2-3/4"

**\*\*NOTE:** Order part number SOCKET 1624/75 to convert these fully adjustable trims for 75W housings. Black finish retainer ring standard. Order part number 1623/24 WHITE for white retainer ring. These fully adjustable trims will only accept one lens. If a FA-16 45MM louver is required, remove the safety lens and use a front glass MR16 lamp. A series of 47mm tempered color or light controlling lenses may be used instead of the clear lens supplied.

## Reflector/Trim Finishes

### Reflector Finish Options:

- CLR - Clear, Specular
- GLD - Gold, Specular
- BLK - Black, Specular
- WHT - White Light, Specular
- PL - Platinum, Matte

### Trim Finish Options:

- P - White
- B - Black
- C - Chrome
- NK - Nickel
- S - Silver UNLook
- CO - Brushed Copper
- ST - Brushed Stainless Steel

