

Trims for 4" Line Voltage Incandescent Recessed Housings

Catalog No. _____

Type _____

Project _____


General Trim Information

All trims are compatible with 4 Inch Line Voltage Incandescent Recessed Housings.

All trims have white trim finish unless specified.

All trims are cULus listed.

All trims are suitable for damp locations; only shower trims are listed for wet locations.



CTR2001-B

Black Baffled Downlight, Black Trim Ring


CTR2001-P

Black Baffled Downlight

CTR2001W-P

White Baffled Downlight


All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton).



CTR2005-P

Mini-recessed Pin Spot


All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton). Aluminum reflector.

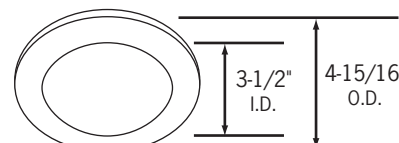

CTR2011FR-(NK, P)

Flat Frosted Glass Lens Shower Light


All steel construction. (3) heat treated spring steel mounting clips. 1/8" thick heavy duty polyethylene sponge gasket. Wet location listed. 35W PAR20 maximum lamp.

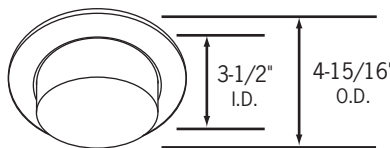

CTR2006-P

Drop Opal Glass Shower Light


All steel construction. (3) heat treated spring steel mounting clips. 1/8" thick heavy duty polyethylene sponge gasket. Wet location listed. 35W PAR20 maximum lamp.

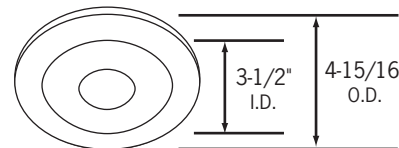

CTR2011PH-(NK, P)

Flat Frosted Glass Lens Shower Light with Clear Pin Hole

All steel construction. (3) heat treated spring steel mounting clips. 1/8" thick heavy duty polyethylene sponge gasket. Wet location listed. 35W PAR20 maximum lamp.

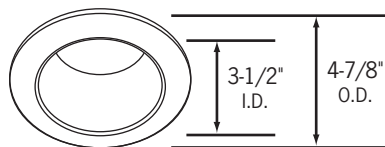

CTR2002-BLK-B

Black Specular Aluminum Reflector

CTR2002-BLK-P

Black Specular Aluminum Reflector

CTR2002-CLR-P

Clear Specular Aluminum Reflector


CTR2002-GLD-P

Gold Specular Aluminum Reflector

CTR2002-WHT-P

White Specular Aluminum Reflector


All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton).

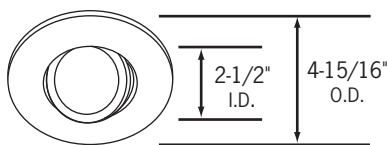

CTR2007-(P, B, NK, PB, S)

Surface Adjustable

28° vertical adjustment. All steel construction. (3) heat treated spring steel mounting clips. Lamp retaining sweep spring clip. 50W PAR20 maximum lamp.

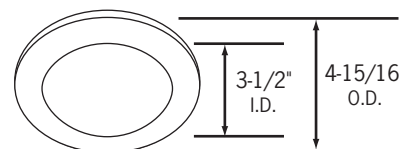

CTR2012-P

Flat Alabite Glass Lens Shower Light


All steel construction. (3) heat treated spring steel mounting clips. 1/8" thick heavy duty polyethylene sponge gasket. Wet location listed. 35W PAR20 maximum lamp.



CTR2003-P

Mini-recessed Scoop Wall Wash

All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton).

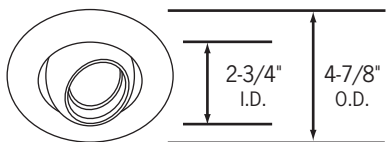

CTR2008-P

Mini-recessed Eyeball

30° vertical adjustment. All steel construction. (3) heat treated spring steel mounting clips.

Reflector/Trim Finishes

Reflector Finish Options:

- CLR** - Clear, Specular
- GLD** - Gold, Specular
- BLK** - Black, Specular
- WHT** - White Light, Specular

Trim Finish Options:

- B** - Black
- NK** - Nickel
- P** - White
- PB** - Polished Brass
- S** - Silver



1-800-728-0312

www.con-techlighting.com

All specifications subject to change without notice.