

Trims for 5" Incandescent Recessed Housings

Catalog No. _____

Type _____

Project _____


General Trim Information

Trims are compatible with 5" Incandescent Recessed Housings.
All trim rings are cULus listed and have white trim finish unless specified.
All trims are suitable for damp locations; only shower trims are listed for wet locations.
Select trims have a unique Two Stage lamp holder assembly.



Two Stage Lampholder Assembly Information

Innovative, exciting design allows simple snap-in lampholder assembly for PAR30 and BR30 lamps in the baffle, multiplier and open trim models. The upper position accommodates the long neck PAR30LN and BR30 lamps. Shifting the porcelain lamp socket to the lower snap-in slots perfectly positions the short neck PAR30 lamps. In either case, the lamp is optimally placed to give maximum light distribution with minimum glare.

Upper Lamp Socket Position

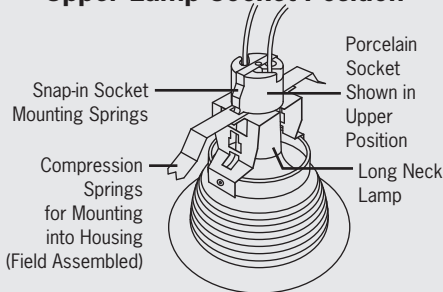

Lower Lamp Socket Position

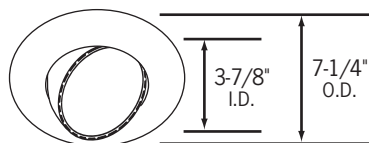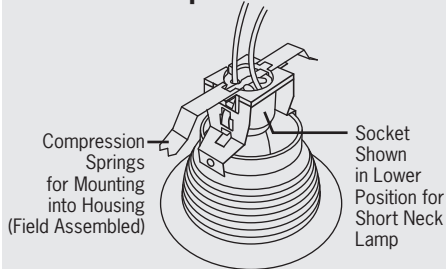


CTR53008-B
PAR30 Black Eyeball, Black Trim

CTR53008-P
PAR30 White Eyeball, White Trim

Beveled steel trim ring. 35° Vertical adjustment, 358° horizontal positioning. All steel construction. (2) Butterfly spring clips, heat treated steel.

Maximum Wattage:
IC Housings: 75W PAR30
Non-IC Housings: 75W PAR30

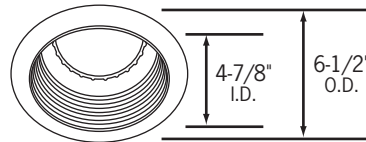


CTR51901-B
PAR30/A19 Black Baffle, Clear Reflector, Black Trim Ring

CTR51901-P
PAR30/A19 Black Baffle, Clear Reflector

CTR51901-WHT
PAR30/A19 White Baffle, White Reflector
Baffled models available in black, for low surface brightness, or white, to blend in with white ceilings. White sculptured steel trim rings. Specular aluminum reflector. Steel tapered baffle. (2) Heat treated steel mounting springs.

Maximum Wattage:
IC Housings: 40W A19, 65W BR30, 75W PAR30
Non-IC Housings: 60W MB19, 65W BR30, 75W PAR30, 75W A19

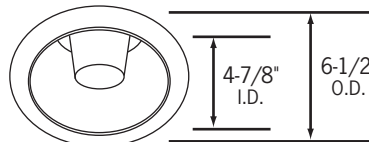


CTR51902-CLR
PAR30/A19 Multiplier, Clear Reflector

CTR51902-WHT
PAR30/A19 Multiplier, White Reflector

Reflector with white sculptured steel trim rings. Specular aluminum reflector. (2) Heat treated steel mounting springs.


Maximum Wattage:
IC Housings: 40W A19, 65W BR30, 75W PAR30
Non-IC Housings: 60W MB19, 65W BR30, 75W PAR30, 75W A19

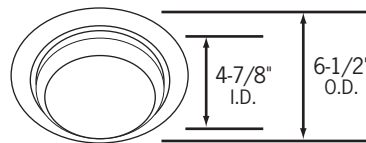

CTR51912-P
PAR30/A19 Convex Glass Shower Light Trim

Wet location listed. Beveled white steel trim ring. Heavy-duty neoprene gasket (1/16" thick). Full specular aluminum reflector for maximum lamp efficiency. Sculptured opal drop glass that is removeable without taking down trim. (2) Butterfly spring clips, heat treated steel.

Maximum Wattage:
IC Housings: 40W A19, 50W PAR30
Non-IC Housings: 75W A19

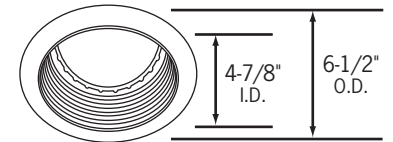


CTR53001-B
PAR30 Black Baffle, Black Trim

CTR53001-P
PAR30 Black Baffle, White Trim

CTR53001-WHT
PAR30 White Baffle, White Trim
2-Stage yolk for short and long neck lamps. Sculptured steel trim ring. Steel tapered baffle. (2) Heat treated steel mounting springs.


Maximum Wattage:
IC Housings: 65W BR30, 75W PAR30
Non-IC Housings: 65W BR30, 75W PAR30

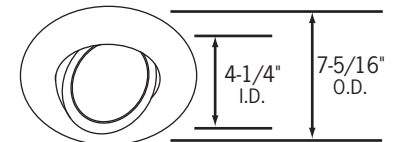

CTR53007-P
PAR30 Surface Adjustable

White gimbal lamp holder. Beveled white steel trim ring. 50° Vertical adjustment, 358° horizontal positioning. All steel construction. Special dual arm lamp retaining steel spring. (2) Butterfly spring clips, heat treated steel. (2) Heat treated steel mounting springs.

Maximum Wattage:
IC Housings: 50W PAR30
Non-IC Housings: 75W PAR30

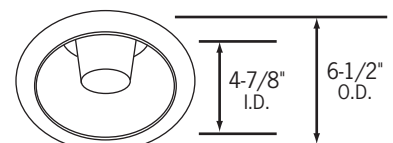

CTR53002-B
PAR30 Multiplier, Black Specular Reflector, Black Trim Ring

CTR53002-CLR
PAR30 Multiplier, Clear Specular Reflector

CTR53002-WHT
PAR30 White Multiplier, White Reflector
2-Stage yolk for short and long neck lamps. Sculptured steel trim ring. Steel tapered baffle. (2) Heat treated steel mounting springs.

Maximum Wattage:
IC Housings: 65W BR30, 75W PAR30
Non-IC Housings: 65W BR30, 75W PAR30



1-800-728-0312

www.con-techlighting.com

All specifications subject to change without notice.