



QF150



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Low cost, high quality die cast flood. Tempered glass lens in die cast hinged frame. 150 watt double ended quartz halogen Lamp supplied.

SPECIFICATIONS

Finish:

Durable polyester powder coat bronze or white finish

Housing:

Precision die cast aluminum housing, 1/2" NPS threaded arm with locking swivel fits all standard mounting boxes. Round back design with fins for heat dissipation to extend lamp life.

Lens Gasket:

High temperature silicone gasket stays in place during relamping

Lens:

5 mm thick, tempered glass lens

Reflector:

Semi-specular anodized aluminum

Sockets:

Porcelain RSC base sockets with gold plated, spring loaded contacts. Teflon coated wires to extend lamp life

Hardware:

Stainless steel external hardware

UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground

EISA 2007 Compliant

This product complies with the new law for metal halide ballast efficiency. This law goes into effect January 1st, 2008

Lamp:

High quality 130 volt Quartz Halogen lamp for extended life. Accepts both 150 and 200 watt lamps

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Replacement Lamp:

LQ150


Color:

Bronze

Weight:

1.55

DIMENSIONS

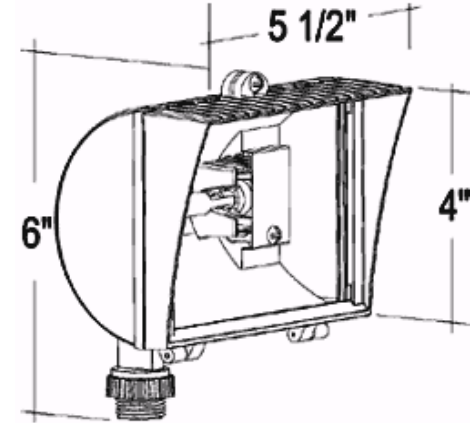

ORDERING INFORMATION

Double Ended Quartz Halogen Lamp supplied with fixture	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
	150	T3	Double Ended	0	0	0	0	0	150	0	2800	2000

Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice