

VAN2F26/277V

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Medium size fixture: 26 and 32 watt compact fluorescent lamp. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor.

SPECIFICATIONS

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver

Sockets:

Plug-in type, thermoplastic

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Ballast Minimum Starting Temperature:

32

Ballast:

277

Lens:

Clear

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN2BB

Color:


Clear

Weight:

4

PHOTOMETRIC

75w Incandescent @ 8' Mounting Height

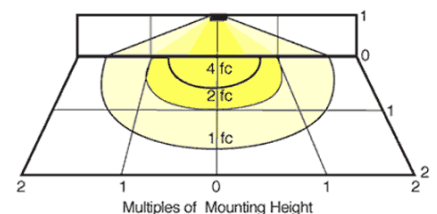

| Mounting Height | Multiplier |
|-----------------|------------|
| 8' | 1.0 |
| 9' | .8 |
| 10' | .7 |
| 12' | .4 |
| 14' | .3 |

| Multiplier | Watts Incan | CFL |
|------------|-------------|-----|
| 1.5 | 26 | 1.5 |
| .2 | 32 | .2 |
| 1.0 | 75 | 1.0 |

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

| Total Watts | Lamp Type | Lamp Base | Ballast |
|-------------|--------------|-----------|----------|
| 26 | 2 - 13W Quad | GX23 | NPF 277V |

Starting Amps/ Operating Amps
120V 208V 240V 277V

| Input Watts | LAMP ANSI | Initial Lumens | Lamp Hours |
|-------------|-----------|----------------|------------|
| 0 | | 0 | 0 |

Factory Installed Options
Add suffix to Catalog Number

Swivel Photocontrol (/PCS)
Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice