

## VAN2F32QT

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

### DESCRIPTION

Medium size fixture: 26 and 32 watt compact fluorescent lamp. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor.

### SPECIFICATIONS

#### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

#### Refractor:

Injection molded polycarbonate, designed for maximum structural strength

#### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver

#### Sockets:

Plug-in type, thermoplastic

#### UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

#### Ballast Minimum Starting Temperature:

0

#### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

#### Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN2BB

#### Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

#### Color:


Clear

#### Weight:

3.6

### PHOTOMETRIC

75w Incandescent @ 8' Mounting Height

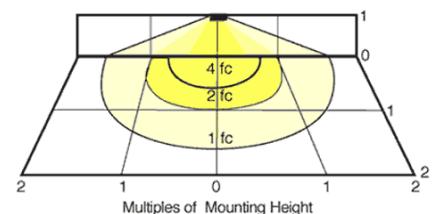

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Multiplier	Watts Incan	CFL
1.5	26	1.5
.2	32	.2
1.0	75	1.0

### ORDERING INFORMATION

**Compact Fluorescent**  
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
32	32w Triple	GX24q-3	Elec HPF QT

**Starting Amps/ Operating Amps**  
120V 208V 240V 277V

**Input Watts LAMP ANSI Initial Lumens Lamp Hours**

0.31	0.2	0.2	0.13	32	2400	12000
------	-----	-----	------	----	------	-------

**Factory Installed Options**  
Add suffix to Catalog Number

Swivel Photocontrol (/PCS)  
Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice