



VAN4F26QT



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Large size fixture: 52 watt compact fluorescent. Reflector is die formed heavy gauge steel in white finish with clear polycarbonate refractor. Lamp supplied.

SPECIFICATIONS

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER)

Sockets:

Plug-in type, thermoplastic

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Ballast Minimum Starting Temperature:

0

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN4BB

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts


Color:

Clear

Weight:


6.9

DIMENSIONS

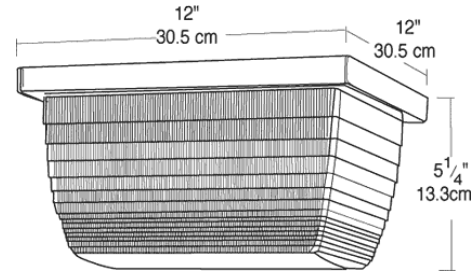

PHOTOMETRIC

150w Incandescent @ 8' Mounting Height

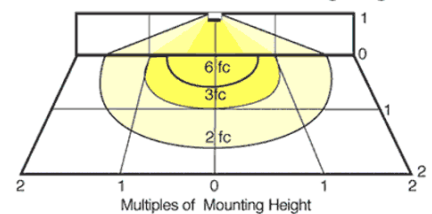

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Watts	Multiplier	Incan	CFL
52			1.5
150		1.0	

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
26	26W Triple	GX24q-3	Elec HPF QT

Starting Amps/ Operating Amps
120V 208V 240V 277V

Input Watts LAMP ANSI Initial Lumens Lamp Hours

0.24	0.2	0.18	0.11	29	1800	12000
------	-----	------	------	----	------	-------

Factory Installed Options
Add suffix to Catalog Number

Swivel Photocontrol (/PCS)
Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
 © 2008