


### ACRYLIC BATH WHIRLPOOL

# K-1144, K-1144-F

#### FEATURES

- 60" (152.4cm) x 60" (152.4cm) x 20-1/4" (51.4cm)
- Acrylic
- Drop-in rim style or tile flange, right-hand pump
- 6 individually adjustable multi-directional hydro-massage jets
- 1-1/4 HP pump with air switch and cord with plug
- Molded lumbar supports and armrests
- UL listed
- For corner installation
- Optional K-1491 removable pillow
- Optional K-1639 timer kit

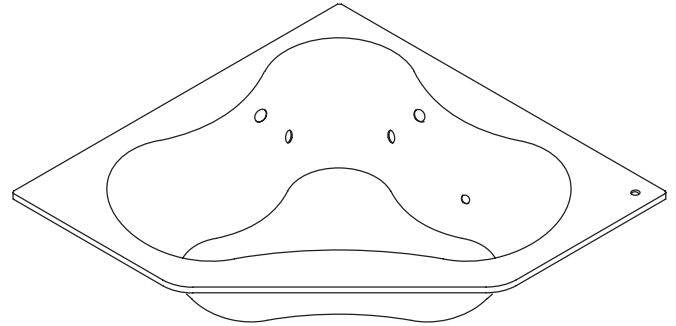

#### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME/ANSI A112.19.7M
- ANSI Z124.1
- IAPMO/UPC
- Underwriters Laboratories (UL)
- State of Massachusetts

#### COLORS/FINISHES

- 0 White
- Other Refer to Fixtures Price Book for additional colors

#### Accessories:

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Price Book for additional finishes
- NA None Applicable

#### SPECIFIED MODEL:

Model	Description	Colors/Finishes	
K-1144	Whirlpool, drop-in rim style, right-hand pump (shown)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1144-F	Whirlpool, tile flange, right-hand pump	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____

Recommended Accessories			
K-11677	Drain		<input type="checkbox"/> CP

Optional Accessories			
K-9696	Jet trim kit (metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____
K-1491	Pillow	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1639	Timer Kit		<input type="checkbox"/> NA

#### PRODUCT SPECIFICATION:

The bath whirlpool shall be 60" (152.4cm) in length, 60" (152.4cm) in width, and 20-1/4" (51.4cm) in height. Bath whirlpool shall be made of acrylic, drop-in rim style and tile flange, right-hand pump. Bath whirlpool shall have 6 individually adjustable multi-directional hydro-massage jets, 1-1/4 HP pump with air switch and cord with plug. Bath whirlpool shall have molded lumbar supports and armrests. Bath whirlpool shall be UL listed. Bath whirlpool shall be for corner installation. Bath whirlpool shall have optional K-1491 removable pillow. Bath whirlpool shall have optional K-1639 timer kit. Bath whirlpool shall be Kohler Model K-1144-\_\_\_\_\_ -\_\_\_\_\_.

# PROFLEX™ 6060

## PRODUCT INFORMATION

Fixture*:	basin area	top area	weight
Bathing well	49" (124.5cm) x 39" (99.1cm)	62" (157.5cm) x 47" (119.4cm)	89 lbs. (40.4kg)
	water depth	capacity	
To overflow	15-1/2" (39.4cm)	96 gal. (363.4L)	
* Approximate measurements for comparison only.			


Pump:	HP	V	Hz	A
1-speed	1-1/4	120	60	7.5

## REQUIRED ELECTRICAL SERVICE

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (61cm) of the pump.	

## INSTALLATION NOTES

Install this product according to the installation guide.  
Floor support under whirlpool must provide for a minimum of 80 lbs./square foot (390 Kg./square meter) loading.

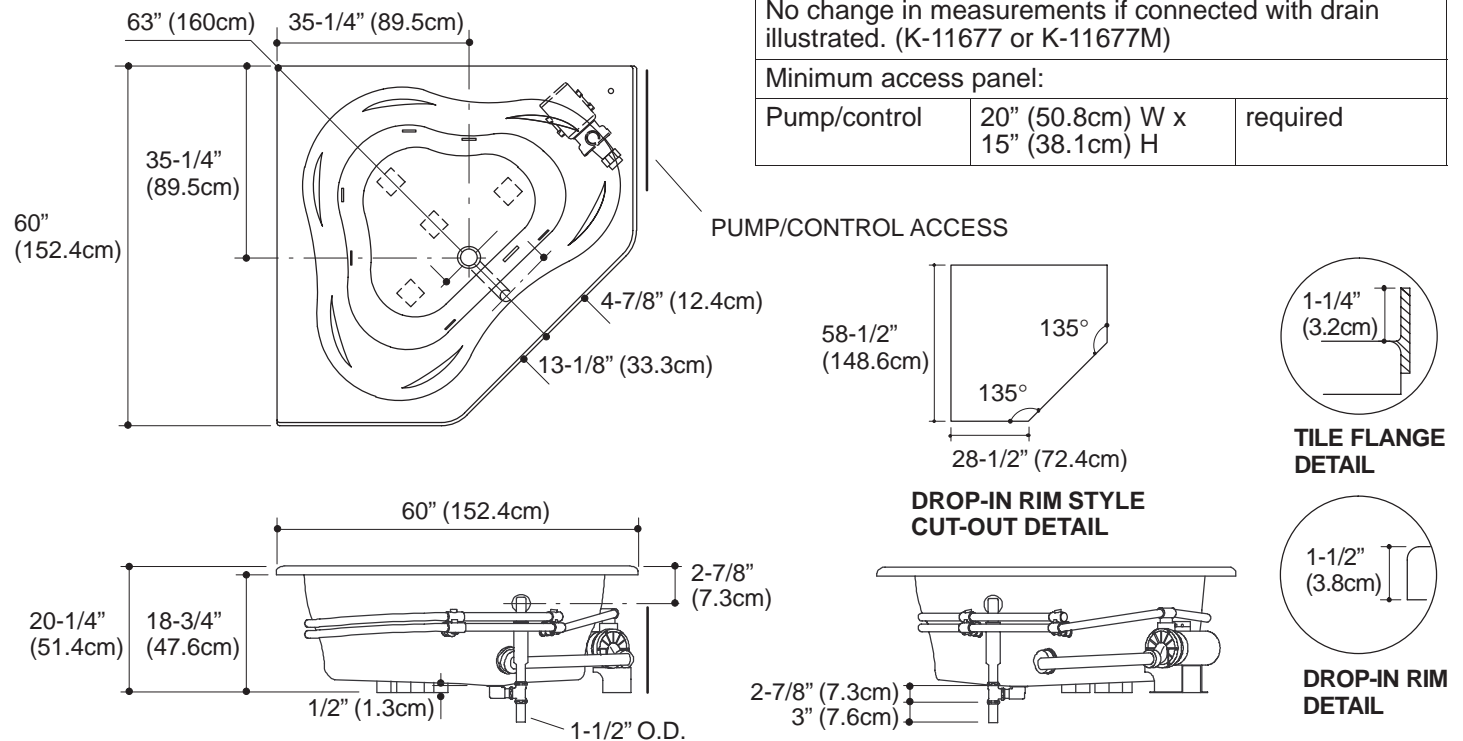

## PRODUCT DIAGRAM