
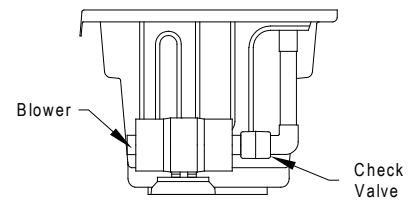


Integrity™ Collection Specifications

AirMasseur® - B3260


with Integral Tile Lip

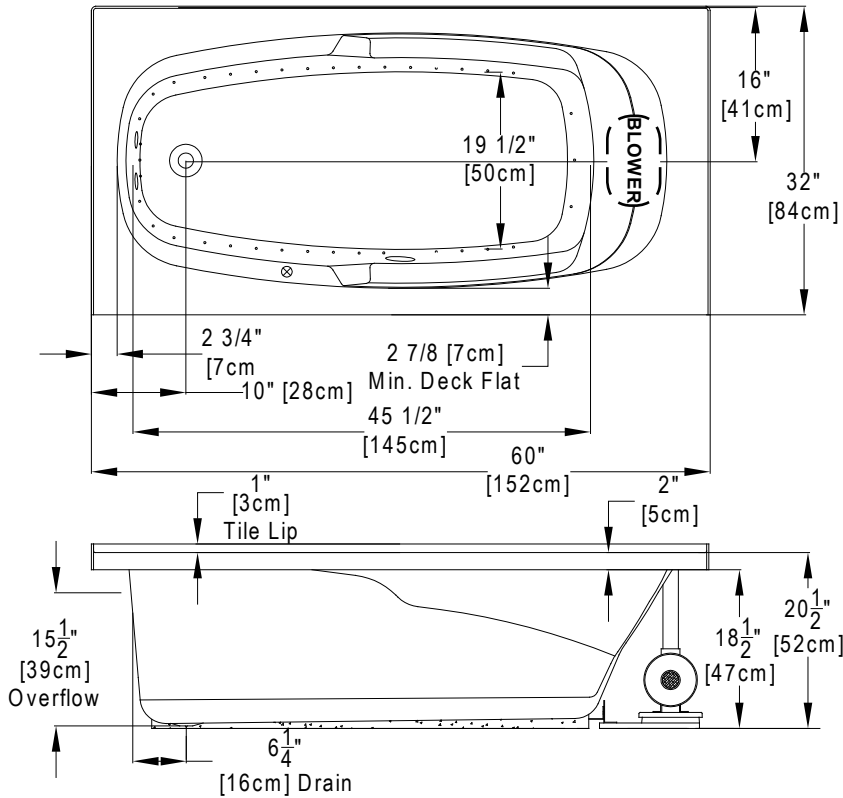

Patents recieved or pending.

Note: Dimensional Tolerances: ±1/4"

Drop-in-Hole Size:	N/A
Operating Capacity:	32 Gal.
Overflow Capacity:	52 Gal.
Floor Loading / sq.ft.:	49.1 lbs.
Carton Weight:	107 lbs.
Cube:	28.1 ft. ³



Includes a quiet, 120v, 1HP, variable speed air blower with an integral air heater, 20-minute timer and automatic purge cycle. Air switch operates the On/Off and blower speed functions. Requires (1) 15A, 120v GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

We provide products listed with Underwriters Laboratories, Inc. (UL), International Association of Plumbing and Mechanical Officials (IAPMO), Canadian Underwriters Laboratory (CUL), Intertek ETL SEMCO (Edison Testing Laboratories) U.S. and Canadian. Consult factory with your listing requirements.