


## Integrity™ Collection Specifications

# Whirlpool & Soaking - B3660

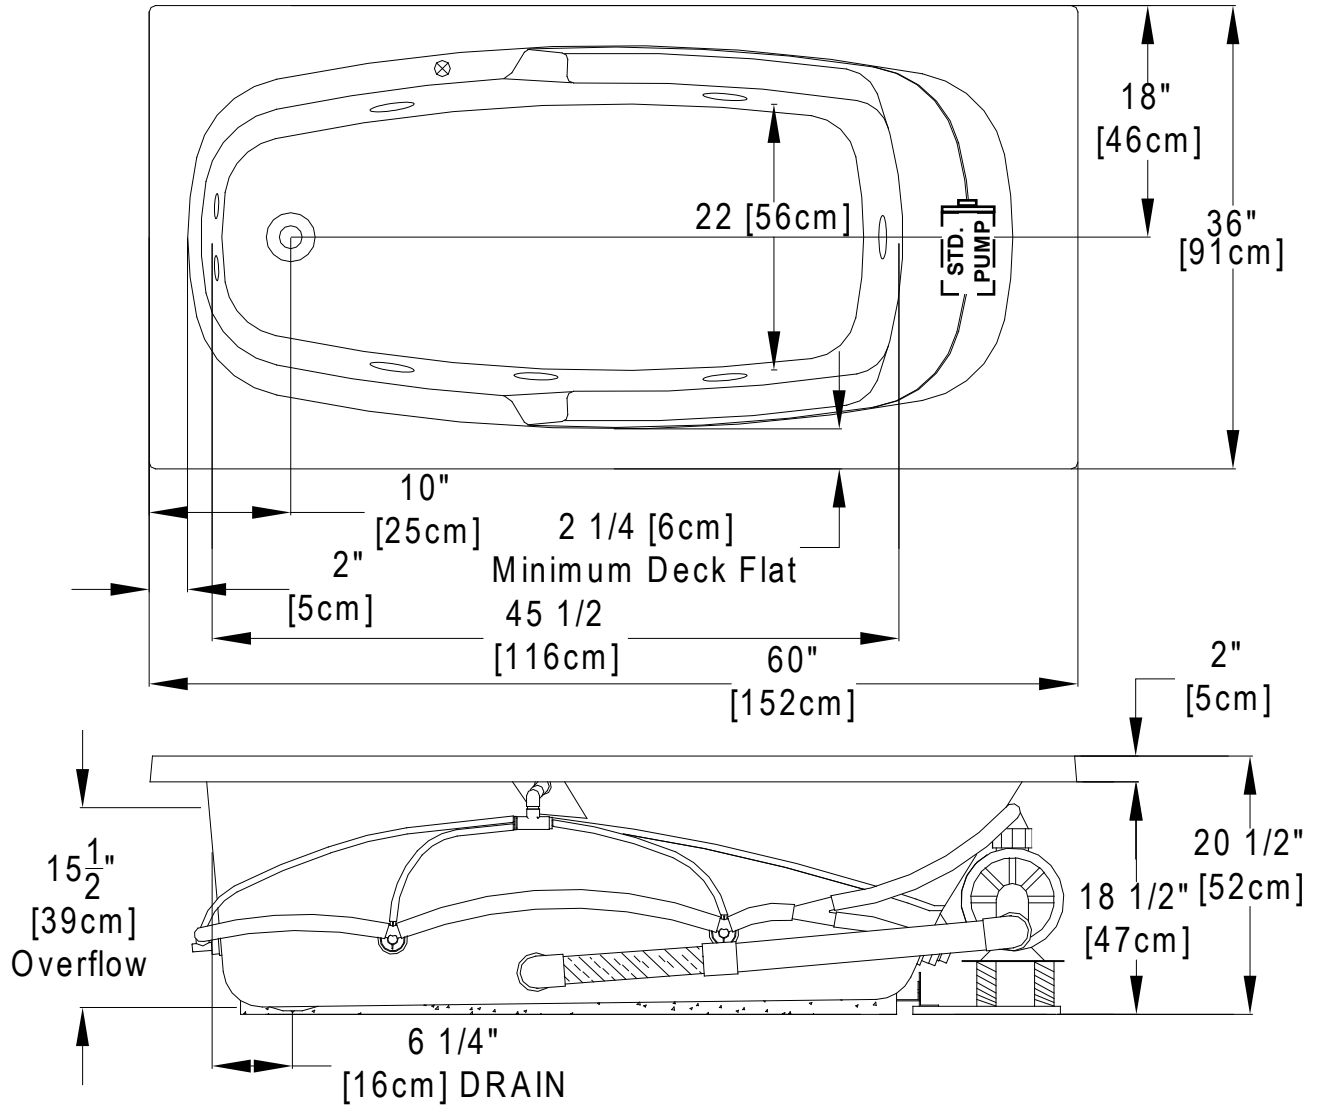


Patents recieved or pending.

Note: Dimensional Tolerances: ±1/4"

- Drop-in-Hole Size:** 34" x 58"
- Operating Capacity:** 37 Gal.
- Overflow Capacity:** 56 Gal.
- Floor Loading / sq.ft.:** 46.6 lbs.
- Carton Wt. (WP/Soaking):** 101/69 lbs.
- Cube:** 31.3 ft.<sup>3</sup>

Air Switch Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch On/Off control. Requires (1) 20A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*