

# **The Centaurus™**

**FP4220 Series**




## **SPECIFICATION SHEET**



*Product Specifications subject to change*

# The Centaurus™ Fan Assembly – FP4220\*\*

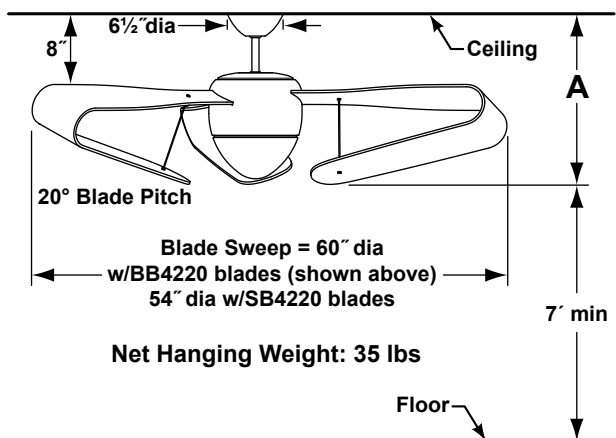

Dimensions shown in inches

Available Finishes	
BL	Black
SN	Satin Nickel

Distance from Ceiling to Edge of Blade	A
Fan w/6" downrod	15"
Fan w/12" downrod	21"
Fan w/18" downrod	27"
Fan w/24" downrod	33"
Fan w/36" downrod	45"
Fan w/48" downrod	57"
Fan w/60" downrod	69"
Fan w/72" downrod	81"

## INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz version is available.

## FAN SPEEDS:

3 fan speeds with reversing control. High – 85 rpm; Med – 45 rpm; Low – 40 rpm

## CONTROL OPTIONS:

The reversing, hand-held remote control (C20) and canopy-style receiver unit (RECAN355) are included. Push button remote control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate fan speeds, infinite light levels, reverse and off button. Installation and operating instructions provided with control. Optional wall control (C21) is available (to be used in conjunction with fan receiver).

## LIGHTING OPTIONS:

The 3-bulb (40 watt max candelabra bulbs - not included) downlight fixture is included with this fan assembly. Maximum wattage of downlight not to exceed 120 watts.

## DOWNROD OPTIONS:

The Centaurus® fan comes with a standard 6" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Centaurus® fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

## BLADE SETS:

A set of 3-blade set required - sold separately. Bent-Blade (BB) / Straight-Blade (SB) material is 5-layer wood. Available finishes are BB4220CY / SB4220CY (Cherry); BB4220MH / SB4220MH (Mahogany) and BB4220MP / SB4220MP (Maple). See Catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more information.

## DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway  
Zionsville, IN 46077  
Toll Free (888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website [www.fanimation.com](http://www.fanimation.com)

