

CATALOG NO. _____

TYPE NO. _____

JOB NAME _____


eclipse
SERIES

**LED Exit Sign
(CP)**



ORDERING INFORMATION

Catalog Number: Example: CPRW32E

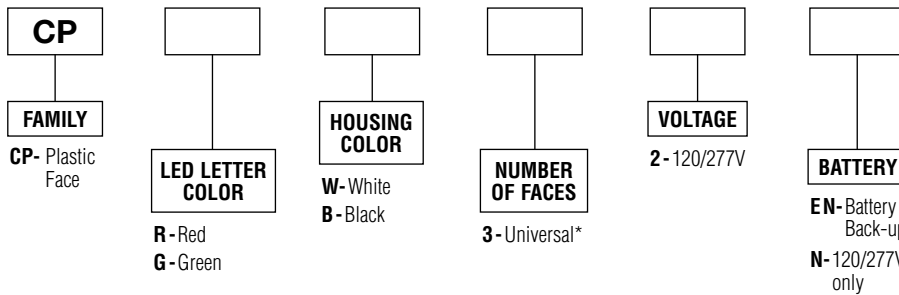

* Universal: Single with extra stencil and color diffuser

SPECIFICATIONS

Housing	Housing and matching canopy constructed of impact-resistant, scratch-proof, corrosion-proof, UV-stable thermoplastic with a UL94-5VA flame rating. Thermoplastic stencil face with 6" letters and universal replaceable chevron directional indicator knock-outs.
Illumination	Long-lasting, energy-efficient, high intensity advanced LEDs (6). Red LED - AlInGaP Green LED - GaN
Electronics	Dual voltage 120/277 VAC, 60 Hz. Combination AC indicator light/test switch. Emergency Operation - Automatic, solid-state, quasi-constant current charger. - AC lockout. - Low voltage disconnect. - Short-circuit protection.
Battery	Long life, high performance, maintenance-free, rechargeable sealed nickel cadmium battery. Trouble-free operation in ambient temperatures up to 104°F (40°C). Provides a total of 120 minutes of full light output LED illumination.
Code Compliance	UL listed, conforms to UL924. Meets NFPA Life Safety Code 70 and 101. Complies with NEC and OSHA.
Warranty	Limited 5-year warranty. 5-year sealed nickel cadmium pro-rated battery warranty.


PRODUCT AVAILABILITY

FAMILY	LED LETTER COLOR	HOUSING COLOR	NUMBER OF FACES	VOLTAGE	BATTERY	LENGTH	WIDTH	HEIGHT
CP	R	W	Universal*	120/277V		11 3/4"	1 5/8"	7 1/2"
	R	B	Universal*	120/277V				
	G	W	Universal*	120/277V				
	G	B	Universal*	120/277V				
CP	R	W	Universal*	120/277V	EN	11 3/4"	1 5/8"	7 1/2"
	R	B	Universal*	120/277V	EN			
	G	W	Universal*	120/277V	EN			
	G	B	Universal*	120/277V	EN			

PRODUCT FEATURES

- Advanced LED technology provides bright, even illumination for visibility and safety.
- Long-life energy-efficient LEDs reduce annual energy consumption.
- 1.0 Watt consumption (Red 120V only).
- Maintenance-free – eliminates the costly expense of changing incandescent bulbs and fluorescent lamps.
- Contemporary style with a clean, low profile, soft contoured design – can be field mounted in tandem to Eclipse Emergency Light.
- Universal mounting canopy – top and side. Back mounting plate provided.
- Universal units are provided with extra stencil and color diffuser.
- UL listed, conforms to UL924.

DIMENSIONS

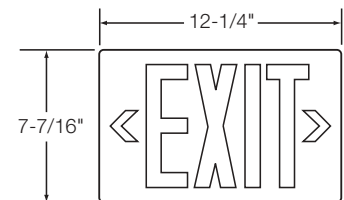

Dimensions and specifications subject to change without notice.