



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

TRAC 12

Miniature Trac System

CYLINDRA™

TL141

PRODUCT DESCRIPTION

The contemporary styling of the Cylindra fixture enables it to subtly enhance practically any decor without diverting attention from surrounding environment. Soft curved surfaces combine with clean, crisp edges to provide a uniquely attractive aesthetic. Its fully enclosed design eliminates stray light that may be undesirable in certain applications. Cylindra's integral, bayonet-mounted accessory holder accommodates up to two accessories simultaneously.

Lamp 20-50W MR16 lamps.

Construction Die cast aluminum housing.

Socket Ceramic bi-pin.

Accessory Holder Integral to fixture design • Die cast aluminum construction • Precision bayonet mounting • Accommodates up to two 2" accessories simultaneously • Clear glass lens included with fixture.


Aiming 90° vertical aiming capability and 360° rotation.

Labels UL and C-UL Listed • Union made, AFL-CIO.



Low Voltage MR16 - Cylindra™

Catalog Number	Description	Finish	Lamp
TL141WH	Cylindra™	White	20-50W MR16, 12V or 24V
TL141BL	Cylindra™	Black	20-50W MR16, 12V or 24V
TL141SL	Cylindra™	Silver	20-50W MR16, 12V or 24V



ACCESSORIES

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
T741-6	Color Filters/Lenses	T7477	Prismatic Spread Lens	T7478	Linear Spread Lens
T7401-18	Dichroic Lenses	T7420	Diffuse Spread Lens	T7421	Uniformity Lens
T7422	UV Filter Lens	T7459BL	Hexcell Louver		

See specification sheet D1.2.2 for details.


TRAC 12

Miniature Trac System

CYLINDRA™

TL141

CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

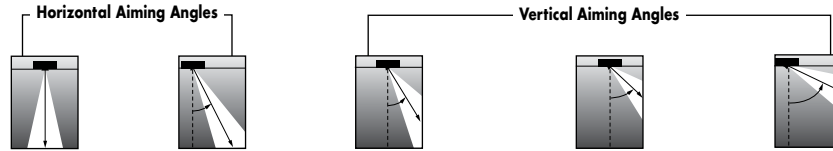

Lamp	Beam Type	Beam Spread°	Rated Life	CBCP	0°				30°			30°				45°				60°						
					MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W	D	FC	X	L	W	
Q35W MR16	SP	20°	5000	3900	4	244	1.4	1.4	158	1.9	1.6	2	122	3.5	3.1	1.4	345	2.0	1.5	1.0	4	158	2.3	1.9	1.6	
					6	108	2.1	2.1	70	2.8	2.4	3	54	5.2	4.7	2.1	153	3.0	2.2	1.5	6	70	3.5	2.8	2.4	
					8	61	2.8	2.8	40	3.8	3.3	4	31	6.9	6.2	2.8	86	4.0	2.9	2.0	8	40	4.6	3.8	3.3	
					10	39	3.5	3.5	25	4.7	4.1	5	20	8.7	7.8	3.5	55	5.0	3.6	2.5	10	25	5.8	4.7	4.1	
					12	27	4.2	4.2	18	5.7	4.9	6	14	10.4	9.3	4.2	38	6.0	4.4	3.0	12	18	6.9	5.7	4.9	
					FL	40°	5000	1000	4	63	2.9	2.9	41	4.1	3.4	2	31	3.5	9.6	2.9	88	2.0	3.4	2.1	4	41
	6	28	4.4	4.4	18				6.1	5.0	3	14	5.2	14.5	4.4	39	3.0	5.0	3.1	6	18	3.5	6.1	5.0		
	8	16	5.8	5.8	10				8.1	6.7	4	8	6.9	19.3	5.8	22	4.0	6.7	4.1	8	10	4.6	8.1	6.7		
	10	10	7.3	7.3	6				10.2	8.4	5	5	8.7	24.1	7.3	14	5.0	8.4	5.1	10	6	5.8	10.2	8.4		
	12	7	8.7	8.7	5				12.2	10.1	6	3	10.4	**	8.7	10	6.0	10.1	6.2	12	5	6.9	12.2	10.1		
	Q50W MR16	NSP	15°	6000	9100				4	638	1.0	1.0	414	1.3	1.1	2	319	3.5	2.1	1.0	902	2.0	1.0	0.7	8	104
						6	283	1.5	1.5	184	2.0	1.7	3	142	5.2	3.1	1.5	401	3.0	1.5	1.0	10	66	5.8	3.3	2.8
8						159	2.0	2.0	104	2.6	2.3	4	80	6.9	4.1	2.0	225	4.0	2.0	1.4	12	46	6.9	3.9	3.4	
10						102	2.5	2.5	66	3.3	2.8	5	51	8.7	5.1	2.5	144	5.0	2.5	1.7	14	34	8.1	4.6	4.0	
12						71	2.9	2.9	46	3.9	3.4	6	35	10.4	6.2	2.9	100	6.0	3.0	2.1	16	26	9.2	5.3	4.5	
NFL						25°	6000	3200	4	213	1.9	1.9	138	2.6	2.2	2	106	3.5	4.6	1.9	301	2.0	2.0	1.4	4	138
		6	94	2.9	2.9				61	3.9	3.3	3	47	5.2	7.0	2.9	134	3.0	3.1	2.0	6	61	3.5	3.9	3.3	
		8	53	3.8	3.8				35	5.2	4.4	4	27	6.9	9.3	3.8	75	4.0	4.1	2.7	8	35	4.6	5.2	4.4	
		10	34	4.8	4.8				22	6.5	5.5	5	17	8.7	11.6	4.8	48	5.0	5.1	3.4	10	22	5.8	6.5	5.5	
		12	24	5.8	5.8				15	7.8	6.7	6	12	10.4	13.9	5.8	33	6.0	6.1	4.1	12	15	6.9	7.8	6.7	
		FL	40°	6000	1700				4	116	2.9	2.9	75	4.1	3.4	2	58	3.5	9.6	2.9	164	2.0	3.4	2.1	4	75
6						51	4.4	4.4	33	6.1	5.0	3	26	5.2	14.5	4.4	73	3.0	5.0	3.1	6	33	3.5	6.1	5.0	
8	29					5.8	5.8	19	8.1	6.7	4	14	6.9	19.3	5.8	41	4.0	6.7	4.1	8	19	4.6	8.1	6.7		
10	19					7.3	7.3	12	10.2	8.4	5	9	8.7	24.1	7.3	26	5.0	8.4	5.1	10	12	5.8	10.2	8.4		
12	13					8.7	8.7	8	12.2	10.1	6	6	10.4	**	8.7	18	6.0	10.1	6.2	12	8	6.9	12.2	10.1		

The beam spread in degrees and the beam "L" and "W" in the following tables are computed at 50% of centerbeam candlepower and represent areas of "effective illumination."

**Due to steep aiming angle, length of beam extends beyond 25'.

12V MR16 HALOGEN LAMPS (not integral lens)

Cat. No.	ANSI Code	Watts	Description	Avg. Life (Hrs.)*
T521	ESX	20	Q20MR16/NSP	5000
T522	BAB	20	Q20MR16/FL	5000
T523	FRA	35	Q35MR16/SP	5000
T526	EXT	50	Q50MR16/NSP	6000
T527	EXZ	50	Q50MR16/NFL	6000
T528	EXN	50	Q50MR16/FL	6000

24V MR16 HALOGEN LAMPS WITH COVER GLASS

Cat. No.	ANSI Code	Watts	Description	Avg. Life (Hrs.)*
TL940-24V	-	35	Q35MR16/CG/NSP/24	1500
TL942-24V	-	35	Q35MR16/CG/NFL/24	1500
TL945-24V	-	50	Q50MR16/CG/NSP/24	1500
TL947-24V	-	50	Q50MR16/CG/FL/24	1500

*At rated voltage.



1300 S. Wolf Road • P.O. Box 5065 • Des Plaines, IL 60017-5065 • Phone (847) 827-9880 • Fax (847) 827-2925
 220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064

Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2007 Juno Lighting, Inc.