


EQX Series Quartz Flood

ORDERING INFORMATION


Catalog Number: Example: EQX500LWHT

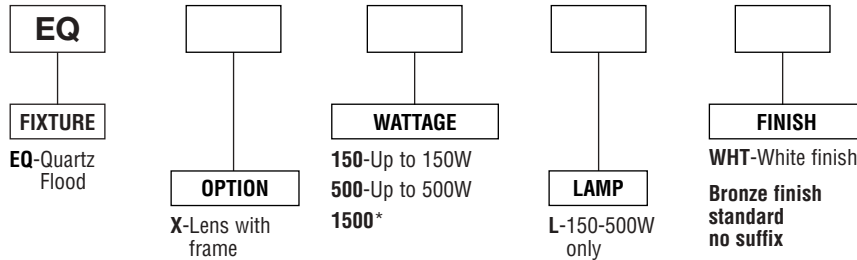

*1500W lamp ordered separately (available in 208, 240 and 277V only).

TECHNICAL INFORMATION

EQX Series Quartz Floods are supplied with Tungsten-halogen T-3 lamp. Must be oriented with 4° of horizontal.

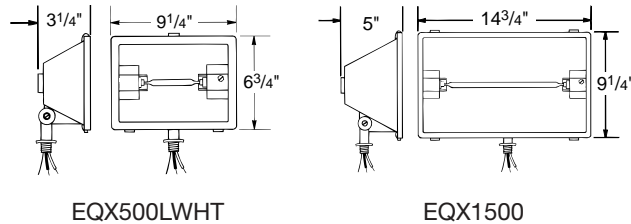

EQX1500



PRODUCT SPECIFICATIONS

- EQ Series Quartz Floods are for use in open area general purpose floodlight applications. Popular uses include residential and commercial security lighting, and sign lighting. For outdoor applications only.
- Die-cast aluminum housing.
- Silicone gasket seals lens to body.
- Sockets with integral spring maintain contact.
- Anodized aluminum reflector provides wide distribution.
- 1/2" Threaded arm mounts to any standard hardware.


CAUTION:

- Not for use indoors.
- Not for use in dwellings.
- Not for use in areas that may entrap heat.
- Not for use in hazardous area, i.e. painting.
- Not for use in ambients above 80°F.
- Not for use in areas with vibration.
- Not for use as a portable fixture.



UL Wet Location Listed.

PHOTOMETRICS

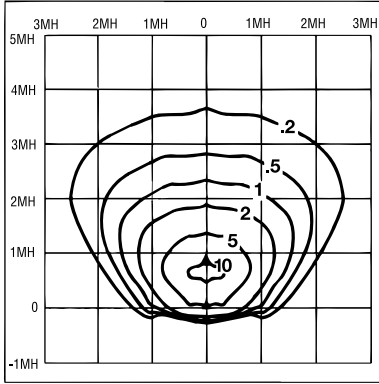

EQX500L
 Q500T3/CL
 10,500 Lumens
 15' Mounting Height
 45° Aim

FOOTCANDLE CORRECTION

Multiply the following factors times the footcandle values for changes in mounting height.

To Change from 15'

New Height	8'	10'	15'	20'	25'
Factor	3.5	2.3	1.0	.60	.36