


# EXOHRLED EXOHGLED

LED  
Exit Sign

Catalog #

Type

Project

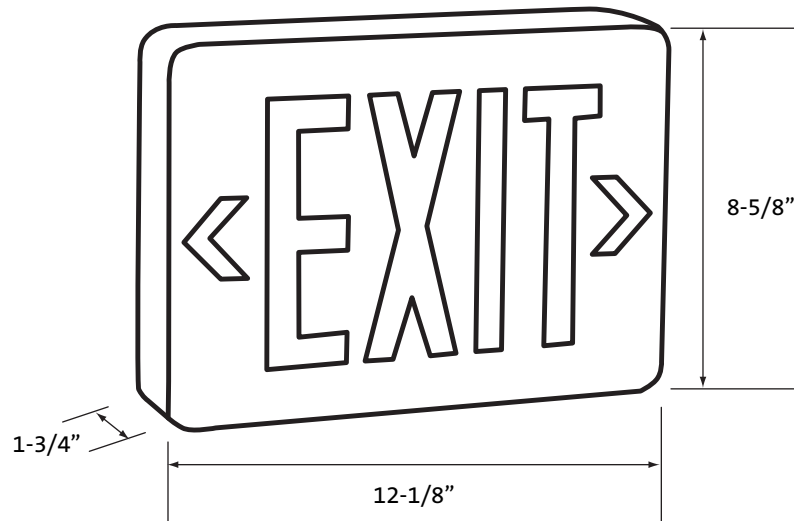

## Specifications/Features

### Housing

Injection-molded thermoplastic housing.  
UL 94V-0 flame rating.  
Innovative, snap-together design allows for fast installation.  
Replaceable directional chevron inserts are easily removed and reinserted.  
Letters are 6" in height with a 3/4" stroke.  
Single or double face configuration.

### Mounting

Universal (wall, side or ceiling) mounting.  
Simple twist and lock action tightly secures housing to canopy.

### Electrical

120/277 VAC dual voltage operation.  
Low energy consumption - only 2.1 watts at 120V.  
LEDs mounted on print circuit board.  
LED lamps operate in normal (AC input) modes.  
AC use only, no battery back-up.

### Warranty

This fixture is covered by Con-Tech's one year full replacement guarantee after installation.

### Listing

ULus listed.

## Ordering Information

Example Order:  -

Fixture

EXOHRLED - Red LED Exit Sign  
EXOHGLED - Green LED Exit Sign

Finish

B - Black Housing  
P - White Housing



1-800-728-0312

www.con-techlighting.com

All specifications subject to change without notice.