



Project: _____

Fixture Type: _____

Location: _____


Contact/Phone: _____

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
 • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation
 • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol  do not require gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Drop socket with spring to accommodate certain trim installation.

Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps
 • Union made AFL-CIO • UL Listed/CSA certified • Trims 241, 242 are wet location approved for covered ceiling applications
 • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION



Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Romex connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel spring to accommodate up to 1¾" ceiling thickness.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
IC22R	120V	A19/BR30/BR40/PAR16/PAR20/PAR30/PAR30L/PAR38/R20 (See reverse for max. trim rating)

DIMENSIONS

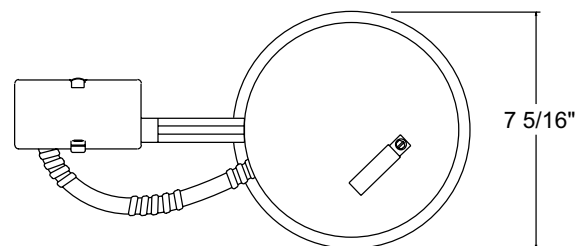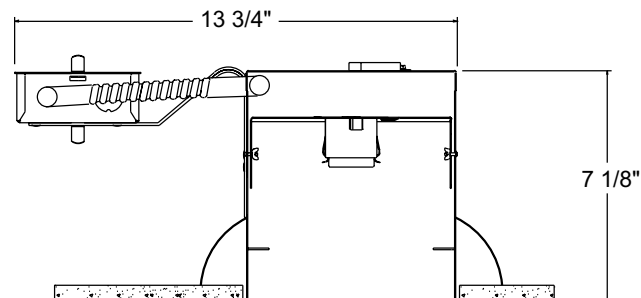

6 3/4" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
ALG6R	Air-Loc Gasket

























To order, specify catalog number.

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

TRIMS/LAMPS

Cat. No.	Description	Max. Lamp Rating	Cat. No.	Description	Max. Lamp Rating
 24B-WH 24B-PB 24B-SC 24B-ABZ 24W-WH	Conical Black Baffle Conical Black Baffle Conical Black Baffle Conical Black Baffle Conical White Baffle	50W PAR30, 75W PAR30L, 65W BR30	 250-WH 250-PB 250-SC 250-ABZ	Open Frame Open Frame Open Frame Open Frame	65W BR30
 25B-WH 25B-PB 25B-SC 25W-WH	Straight Black Baffle Straight Black Baffle Straight Black Baffle Straight White Baffle	50W PAR30, 65W BR30	 252-WH	Regressed Open Frame	75W R/BR30
 28B-WH ♦♦ 28W-WH ♦♦	Conical Black Baffle Conical White Baffle	60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38, 90W BR40	 264B-WH 264W-WH	PAR30 Adjustable - Black Baffle PAR30 Adjustable - White Baffle	50W PAR30
 29C-WH ♦♦ 29W-WH ♦♦	Deep Cone Clear Cone Deep Cone White Cone	60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38, 90W BR40	 267C-WH 267G-WH 267B-WH 267HZ-WH 267WHZ-WH	PAR30 Adjustable - Clear Alzak® PAR30 Adjustable - Gold Alzak® PAR30 Adjustable - Black Alzak® PAR30 Adjustable - Haze PAR30 Adjustable - Wheat Haze	50W PAR30
 27C-WH 27G-WH 27G-PB 27B-WH 27PT-SC 27W-WH 27HZ-WH 27WHZ-WH 27WHZ-ABZ	Conical Cone in Clear Alzak® Conical Cone in Gold Alzak® Conical Cone in Gold Alzak® Conical Cone in Black Alzak® Conical Cone in Pewter Alzak® Conical Cone in Gloss White Conical Cone in Haze Conical Cone in Wheat Haze Conical Cone in Wheat Haze	50W PAR30, 75W PAR30L, 65W BR30	 241-WH ♦ 241-PW ♦	Drop Opal with Reflector Shower/Closet Light	40W A19
 231C-WH 231G-WH 231W-WH	Multiplier - Clear Alzak® Multiplier - Gold Alzak® Multiplier - Gloss White	60W A19	 242-WH ♦ 242-SC ♦ 242-ABZ ♦	Shower Trim, Frosted Lens with Clear Center	45W PAR38
 228-WH	R20 Regressed Eyeball	50W PAR20/R20	 9324-PB 9324-SC	Luminous Disc Luminous Disc	50W PAR30, 65W BR30, 75W PAR30
 229-WH 229-PB 229-SC 229-ABZ	BR30 Regressed Eyeball BR30 Regressed Eyeball BR30 Regressed Eyeball BR30 Regressed Eyeball	75W PAR30L, 65W BR30	 9702	Luminous Collar	50W PAR30, 65W BR30, 75W PAR30L
 248W-WH	R20 Eyeball in White Baffle	50W PAR20/R20	 9024W-WH	White Octagonal w/White Baffle	50W PAR30, 65W BR30, 75W PAR30
 249B-WH 249B-PB 249W-WH	BR30 Eyeball in Black Baffle BR30 Eyeball in Black Baffle BR30 Eyeball in White Baffle	75W PAR30L, 65W BR30	 9524-PB 9524-SC	Brass Band Chrome Band	65W BR30, 50W PAR30, 75W PAR30L
 226B-WH 226W-WH	Black Cylinder w/Black Baffle White Cylinder w/White Baffle	60W PAR16	 XR30101WH XR30101BL XR30101GP XR30101SL	AVIO Square Gimbal Ring - White AVIO Square Gimbal Ring - Black AVIO Square Gimbal Ring - Graphite AVIO Square Gimbal Ring - Silver	75W PAR30
 244B-WH 244W-WH	Conical Black Baffle Conical White Baffle	75W PAR30L, 60W PAR30, 65W BR30	Trim Size: 7 ³ / ₈ " O.D. (except Cat. Nos. 228, 229, 241, 9024, - 8" O.D., Cat. No. 9702 - 7 ³ / ₄ " O.D.). Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite, PB - Polished Brass, PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, SL - Silver, WH - White. Alzak is a registered trademark of Alcoa Corp. Note: In Canada when insulation is present, Type IC fixtures must be used.		
 247C-WH 247G-WH 247B-WH 247HZ-WH 247WHZ-WH	Cone - Clear Alzak® Cone - Gold Alzak® Cone - Black Alzak® Cone - Haze Cone - Wheat Haze	75W PAR30L, 65W BR30, 75W PAR30	Air-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283. Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.		
			♦ UL Listed for use in wet location. ♦♦ UL Listed for use in wet location with outdoor rated lamp.		



1300 S. Wolf Road • P.O. Box 5065 • Des Plaines, IL 60017-5065 • Phone (847) 827-9880 • Fax (847) 827-2925
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2005 Juno Lighting, Inc.