



4" LOW VOLTAGE UNIVERSAL TC REMODEL HOUSING

50W MR16
TC44R

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC Housing.

PRODUCT SPECIFICATIONS

Lamp One 12V, 50W MR16 lamp.

Socket Ceramic bi-pin socket with aluminum heat shield.

Trims Trim selection shown on reverse.

Transformer 120V to 12V 50VA thermally protected magnetic transformer mounted to junction box.

Dimming May be dimmed using dimmers specifically designed for low voltage magnetic transformers; consult factory or dimmer manufacturer for additional information.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • Union made AFL-CIO • UL Listed/CSA certified • Trim No. 441, 4401, 4402 and 4481 are wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

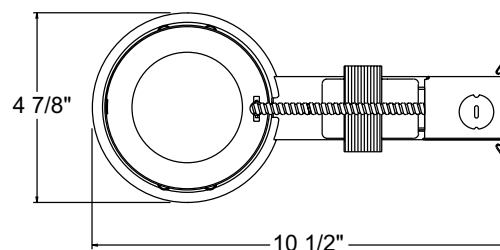
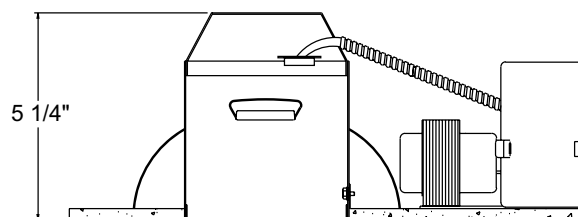
Product specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (4) ½" knockouts, (2) Romex connectors and ground wire • Knockouts equipped with pryout slots.

Housing TC housing, 22 gauge galvanized steel • Remodel springs accommodate up to a 1 1/8" ceiling thickness.

DIMENSIONS



4 3/8" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
SMPLT-4	4" Housing Locator

To order, specify catalog number.

PRODUCT CODES























Catalog Number	Input Voltage	Lamp Rating (max.)
TC44R	120V	12V 50W MR16

4" LOW VOLTAGE UNIVERSAL TC REMODEL HOUSING

50W MR16

TC44R

TRIMS

Cat. No.	Description	Cat. No.	Description
 440-WH 440-BL 440-SC 440-ABZ	Flush Gimbal Ring Flush Gimbal Ring Flush Gimbal Ring 40° Vertical Adjustment	 449-WH 449-BL 449-SC 449-ABZ	75° Vertical Aiming Adjustment
 ◆ 441W-WH ◆ 441W-SC ◆ 441W-ABZ	Adjustable Shower Trim, frosted lens with clear center 35° Vertical Adjustment	 XR16101WH XR16101BL XR16101GP XR16101SL	AVIO Square Gimbal Ring AVIO Square Gimbal Ring AVIO Square Gimbal Ring AVIO Square Gimbal Ring
 443B-WH	Pinhole with Black Baffle Downlight	 ◆ 4401-WH ◆ 4401-SC ◆ 4401-ABZ	Beveled Dome Shower Beveled Dome Shower Beveled Dome Shower
 442C-WH 442G-WH 442B-WH 442HZ-WH 442WHZ-WH	Deep Cone Downlight - Clear Alzak® Deep Cone Downlight - Gold Alzak® Deep Cone Downlight - Black Alzak® Deep Cone Downlight - Haze Deep Cone Downlight - Wheat Haze	 ◆ 4402-WH ◆ 4402-SC ◆ 4402-ABZ	Beveled Adjustable Shower Beveled Adjustable Shower Beveled Adjustable Shower
 444B-WH 444B-SC 444B-ABZ 444W-WH	Downlight or Adjustable with Black Baffle Downlight or Adjustable with Black Baffle Downlight or Adjustable with Black Baffle Downlight or Adjustable with White Baffle 35° Vertical Adjustment	 4403FROST-WH 4403FROST-SC	Beveled Adjustable Cylinder Beveled Adjustable Cylinder
 445-WH	Slot Aperture Downlight or Adjustable 50° Vertical Adjustment	 4404C-WH 4404B-WH 4404HZ-WH 4404HZ-SC 4404WHZ-WH 4404WHZ-ABZ	Beveled Adjustable Cone Beveled Adjustable Cone Beveled Adjustable Cone Beveled Adjustable Cone Beveled Adjustable Cone Beveled Adjustable Cone
 446-WH	Scoop Adjustable 50° Vertical Adjustment	 4450FROST-WH 4450FROST-SC 4450MAIZE-WH 4450COBALT-WH 4450COBALT-SC 4450MESH-WH 4450MESH-SC	Cylinder Cylinder Cylinder Cylinder Cylinder Cylinder
 447C-WH 447G-WH 447B-WH 447PT-SC 447HZ-WH 447WHZ-WH 447WHZ-ABZ	Downlight or Adjustable - Clear Alzak® Downlight or Adjustable - Gold Alzak® Downlight or Adjustable - Black Alzak® Downlight or Adjustable - Pewter Alzak® Downlight or Adjustable - Haze Downlight or Adjustable - Wheat Haze Downlight or Adjustable - Wheat Haze 35° Vertical Adjustment	 4451FROST-WH 4451COBALT-WH	Convex Glass Convex Glass (torsion spring attachment)
 448-WH 448-PB 448-SC	Eyeball with Black Baffle Eyeball with Black Baffle Eyeball with Black Baffle 35° Vertical Adjustment	 4452FROST-WH 4452AMBER-WH 4452COBALT-WH	Dropped Disk Dropped Disk Dropped Disk
		 4453GLASS-WH	Square Glass
		 4454COOL-WH 4454WARM-WH	Segmented Arcs Segmented Arcs
		 4480FROST	Solid Glass Collar (torsion spring attachment)
		 ◆ 4481CLEAR	All Glass Shower (torsion spring attachment)

Note: Lamps may be dimmed. Use dimmers specifically designed for low voltage magnetic transformers; consult factory or dimmer manufacturer for additional information.

Trim Size: 5" O.D.

Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite, PB - Polished Brass, PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, SL - Silver, WH - White.
Alzak is a registered trademark of Alcoa Corp.

◆ UL Listed for use in wet location.



1300 S. Wolf Road • P.O. Box 5065 • Des Plaines, IL 60017-5065 • Phone (847) 827-9880 • Fax (847) 827-2925
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2005 Juno Lighting, Inc.