

LVN35016

Varia


Concealed Adjustable
Illumination
50W, MR16 Lamp

Catalog #

Type

Project

Part Number	Housing Dimensions			Ceiling Opening		Trim Plate Size	
	L	W	H	L	W	L	W
LVN35016X2	23-5/8"	6-7/8"	6-9/16"	9-15/16"	4-3/4"	12-1/4"	6"
LVN35016X3	27-3/4"	6-7/8"	6-9/16"	14-9/16"	4-3/4"	16-3/4"	6"
LVN35016X4	37"	6-7/8"	6-9/16"	18-7/8"	4-3/4"	21-1/4"	6"
LVN35016X5	41-1/2"	6-7/8"	6-9/16"	23-3/8"	4-3/4"	25-5/8"	6"

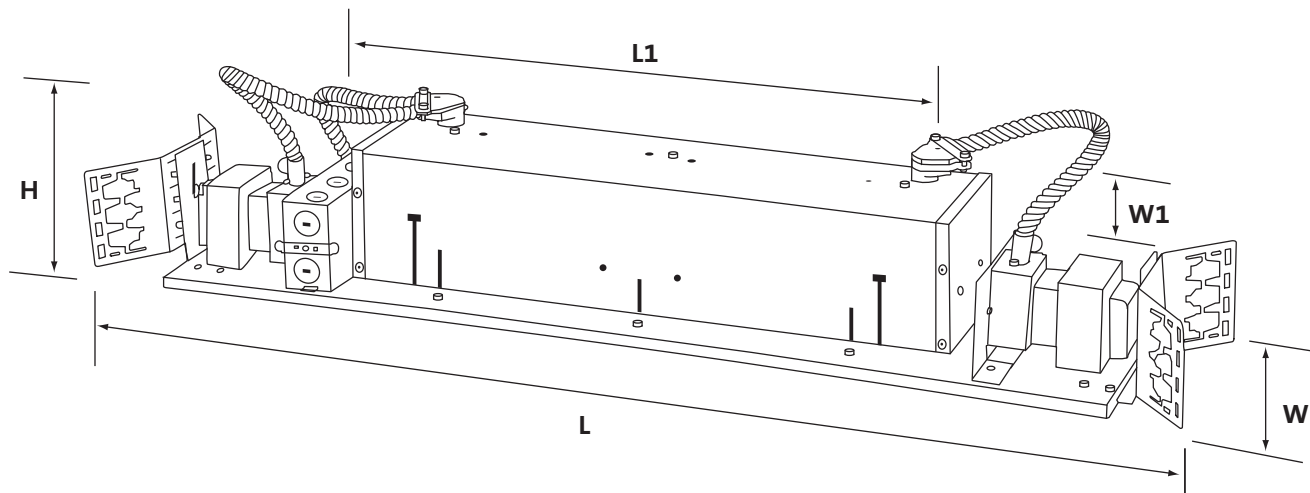

Specifications/Features

Fixture

Recessed multiple accent feature, available in 2, 3, 4 and 5 lamp versions.
Recessed housing for new construction.
Complete with "C" brackets for commercial downlight mounting bars.
Non-IC rated housing.

Lamp

50 Watt MR16 maximum lamp wattage per socket.

Trim

Use any combination of 3" low voltage trims with the housing, over 20 models available (refer to CTR3 product line).
Trims allow for 359° adjustability.

Mounting

Torsionite springs for easy installation of the aperture frame.
Mounting bars can be adjusted vertically.

Electrical

120/12V or 227/12V models feature thermally protected magnetic class H transformers.
Maximum of 8 No. 12 AWG, approved for through circuit 90° wiring.
Junction box has seven knockouts; (3) 1/2", (2) 3/4", and (1) 1/2" + 3/4" concentric.

Labels/Usage

cULus Listed. Suitable for damp locations.

Ordering Information

Example Order: LVN35016X3 - S

Housing

LVN35016X2
LVN35016X3
LVN35016X4
LVN35016X5

Finish

P - Matte White
B - Matte Black
S - Silver UNlook™

