


MODULINEAR

ADJUSTABLE YOKE – LINE VOLTAGE

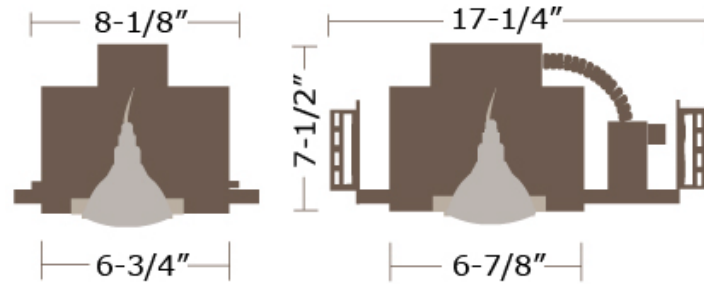

Catalog Information

Item No	Lamping	Max Watts	Finishes	
			Trim Finish	Housing & Gimbal
MYP30-1	(1) PAR30	75W	B = Black S = Silver W = White	B = Black (Standard) S = Silver (consult factory) W = White (consult factory)

Description

Description	New Construction single lamp recessed fixture comprised of separate housing and trim. Trim design allows use in ceilings up to 2" thick. No IC, must maintain 3" clearance from any insulation on all sides.
Housing	3/4" overlap flanges combined with "pull-tight" torsion springs allows forgiveness in minor dry wall cutting errors.
Mounting	Designed to be installed with overlap flange trim. Contractors may opt to install as a flangeless housing if desired. Universal mounting brackets allow the use of conduit, HB or FB bar stock, or "C" channel bars.
Aiming	Gimbal ring 35° vertical. 350° degrees rotation.
Lamp	Line Voltage PAR30 Halogen lamp. Not included.
Finish	Trims available in three finishes (see table above). Housings supplied in black, optional custom finishes available.

Accessories

- Spread Lens
- Prismatic Lens
- Diffused Lens
- Colored Lens – Red, Blue, Yellow, Green
- Snoot
- Cross Baffle
- Accessory Holder
- C-Channel Hanger Bars

Dimensions		
L	W	H
17-1/4"	8-1/8"	7-1/2"
Cut out		
6-7/8" X 6-3/4"		

Product specification subject to change without notice.

www.jescolighting.com

Rev.04/09/08

Submittal Information for Specifier Use:

Job Name:	Date:
Specification Type:	Job Location:



66–25 Traffic Ave, Glendale, NY 11385 Tel: 718.366.3211 Fax: 718.366.3646
 1100 Hatcher Ave, Suite A, City of Industry, CA 91748 Tel: 626.854.8168 Fax: 626.854.8172