


Type _____
 -10 -13
 P3565

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	Polished Brass	Brushed Steel		A	B
P3565	-10	-13	4 (m) 60w	27-3/8	7 1/8

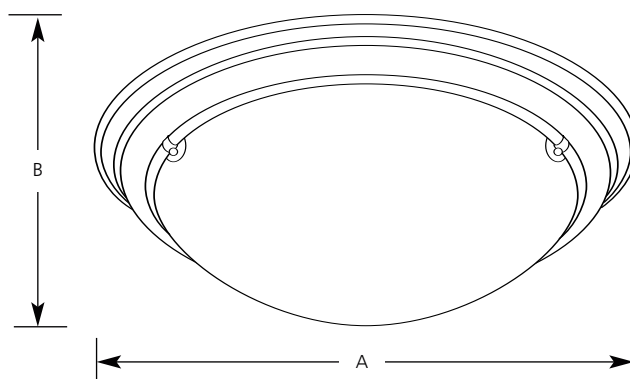

Specifications:

General

- Flush mount design
- Steel construction with Polished Brass (-10) or Brushed Steel (-13) finish
- Satin white glass
- Fiberglass insulated
- Companion foyer, semi-flush and wall sconce

Electrical

- Requires 90-degree supply wire connections
- Ceramic medium based sockets
- Pre-wired

Labeling

- UL-CUL listed

Mounting

- Ceiling mount
- Covers outlet box
- (3) glass retaining clips
- Mounting strap for outlet box included
- Keyhole slots for easy mounting

P3565 ECLIPSE - FLUSH MOUNT



Report No. 97512

No. Lamps: 4 Type Lamp: 60A19 - GE Total Lumens: 3460

Fixture Efficiency: 57.5%


S/MH Ratio: 1.3

Quick Calculator Charts

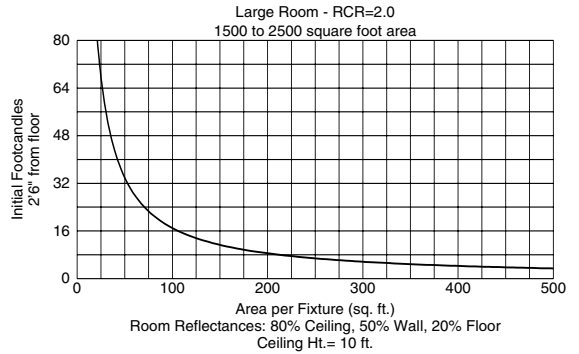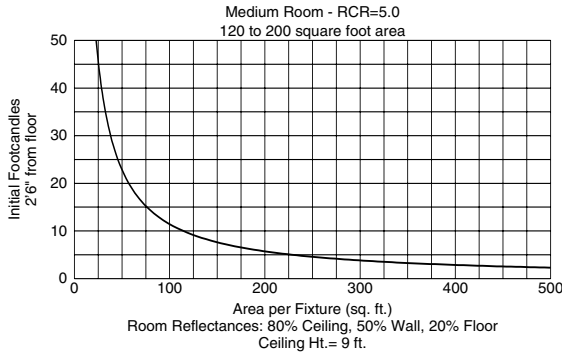

DISTRIBUTION CURVE

INTENSITY DATA

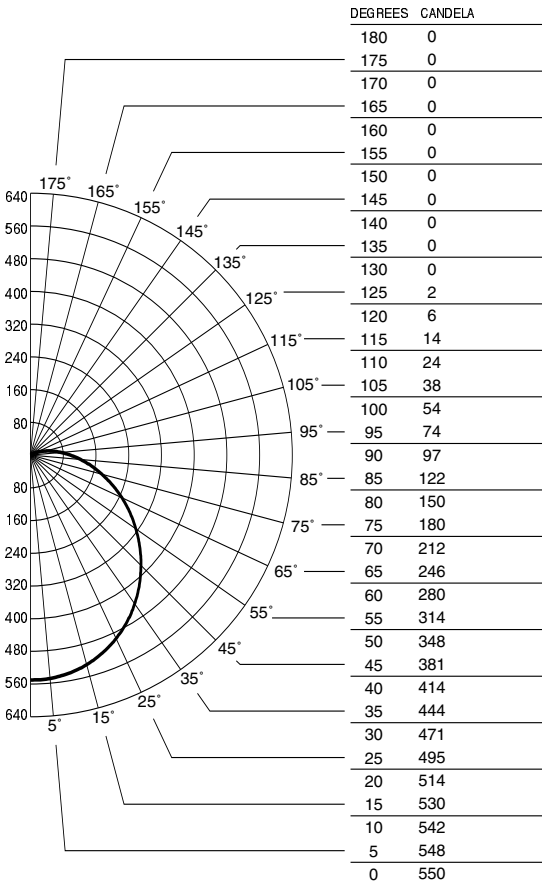

Single Fixture Data

Ceiling Ht. (Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 112'			Beam Angle - 65'	
	Ft.-C	Beam Dia.	Ft.-C	Ft.-C	Beam Dia.
8	1.8	16	18.2	9.1	7
10	1.0	22	9.8	4.9	10
12	0.6	28	6.1	3.0	12
14	0.4	34	4.2	2.1	15
16	0.3	40	3.0	1.5	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

RC	Effective Floor Cavity Reflectance 0.20																		
	70																		
	80				50				30				10				0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0	
0	68	68	68	68	65	65	65	65	62	62	62	58	58	58	55	55	55	54	
1	60	57	54	51	58	55	52	50	52	50	48	49	47	45	46	45	43	42	
2	54	49	44	41	52	47	43	40	45	41	38	42	39	37	40	37	35	34	
3	49	42	37	33	47	41	36	33	39	35	32	37	33	30	35	32	29	28	
4	45	37	32	28	43	36	31	27	34	30	27	33	29	26	31	28	25	24	
5	41	33	28	24	40	32	27	23	31	26	23	29	25	22	28	24	22	20	
6	38	30	24	21	37	29	24	20	28	23	20	26	22	19	25	22	19	18	
7	35	27	22	18	34	26	21	18	25	21	17	24	20	17	23	19	17	15	
8	33	25	20	16	31	24	19	16	23	19	16	22	18	15	21	17	15	14	
9	30	23	18	14	29	22	17	14	21	17	14	20	16	14	19	16	13	12	
10	29	21	16	13	28	20	16	13	19	15	13	19	15	12	18	15	12	11	