


The Palisade[®]

FP240 Series

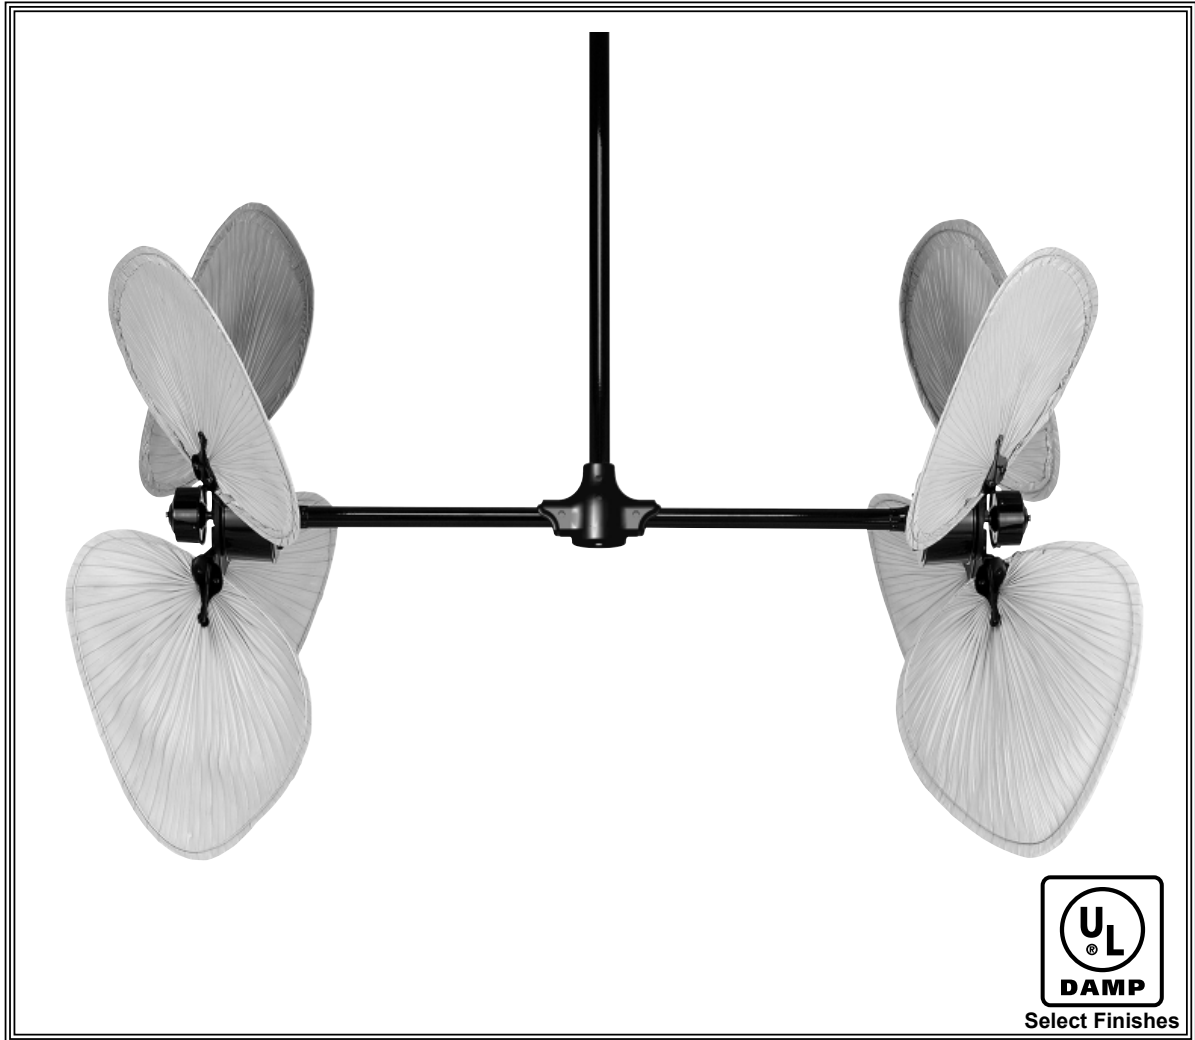


Select Finishes

SPECIFICATION SHEET



Product Specifications subject to change

The Palisade® Fan Assembly – FP240**

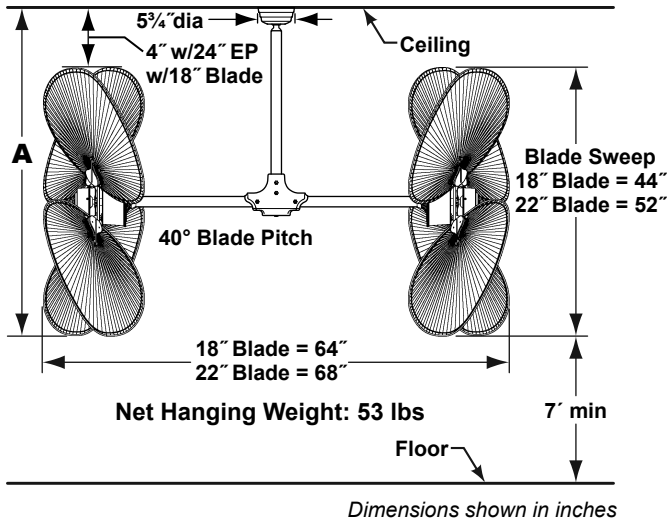

| Available Finishes | |
|--------------------|--------------------------------|
| AB | Antique Brass |
| BL | Black (Damp) |
| MW | Matte White (Damp) |
| OB | Oil-Rub'd Brnz (Damp) |
| PW | Pewter |
| RS | Rust (Damp) |
| SN | Satin Nickel |

| Distance from Ceiling to Bottom of Blades | A |
|---|------|
| *24" Pole w/18" Palm Blades | 51" |
| 30" Pole w/22" Palm Blades | 61" |
| 36" Pole w/22" Palm Blades | 67" |
| 48" Pole w/22" Palm Blades | 79" |
| 60" Pole w/22" Palm Blades | 91" |
| 72" Pole w/22" Palm Blades | 103" |

* 24" Extension Pole may be used with 18" blades only

* Can be mounted on a sloped ceiling up to 45°

| Component Weights | |
|-----------------------------|---------|
| Motor Assembly Unit (2) | 14 lbs |
| Horizontal Tube Assembly | 5 lbs |
| Blade Set (8) [†] | 3-5 lbs |
| Extension Pole [†] | 1 lb/ft |

[†]Sold Separately

INSTALLATION REQUIREMENTS:

Ceiling fan is secured to a structural member such as a ceiling joist and must be capable of withstanding a load of at least 100 pounds. A 3/8" x 5" long lag bolt passes through the loop of the ceiling support cable, hanger bracket plate, the outlet box and into the wood member above.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. Two motors per fan: 120 VAC, 60 Hz, 0.90 amps (each motor). [Single-speed (no control) 220 VAC, 50 Hz version available]

FAN SPEEDS:

High – 50 rpm; Low – 30 rpm

DESIGN FEATURES:

Redesigned to assure stability, convenient assembly and easier installation. The Palisade® fan is now remote control adaptable (see control option below).

CONTROL OPTIONS:

1. Wall control (C3) supplied with fan. Instructions provided with control.
2. Optional fan & light remote control receiver unit (SW24) is available, to be used in conjunction with: C24 hand-held remote control and/or C25 wall-mount remote control. Instructions provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See catalog or visit our website, www.fanimation.com for more lighting options.

BLADE OPTIONS:

Various Palm, Bamboo, and Wood blades are sold separately. See catalog or visit our website, www.fanimation.com for more blade selections.

ACCESSORY OPTIONS:

Various optional accessories are available. Optional sloped ceiling kits (SCK52) are available for up to 52°. See catalog or visit our website, www.fanimation.com for more information.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

