



# LOS2400/120



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

## DESCRIPTION

360° view Super Ceiling Sensor with integral 20 amp power pack. No extra wires to run or extra boxes to install. Covers 2000 sf @ 9' height. LED detection indicator.

## SPECIFICATIONS

### Easy Installation:

Relay and sensor all in one reduces installation cost. Compatible with dimmers and electronic ballasts. LED testing and operation indicator.

### Maximum Reliability:

Adjustable detector sensitivity for superior detection.

### Maximum Versatility:

Adjustable time delay. Sensor detection pattern can be customized. No minimum load requirement. Can be wired in parallel.

### UL Listing:

For indoor applications. Tuff Dome & Smart Box are UL Listed for wet locations.

### >Time Sensitivity

### Adjustments: -/SPECTITLE

Detection: 360° view Super Ceiling Sensor

### Coverage Area:

2000sf @ 9'

### Detection:

360° view Super Ceiling Sensor

### Fluorescent Watts Switched:

2400 watts

### Incandescent Watts Switched:

2400 watts

### Manual Switch:

Override key

### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

### Power Consumption:

Negligible

### Ratings Amps Horsepower:

20 amps 1 horsepower

### Time Delay:

6 to 15 minutes


### Color:

White


### Weight:

0.5

## DIMENSIONS

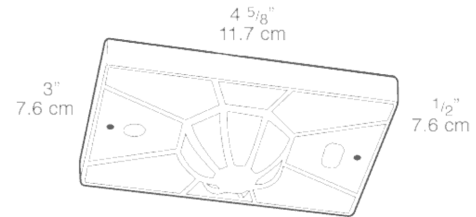

## DETECTION PATTERN

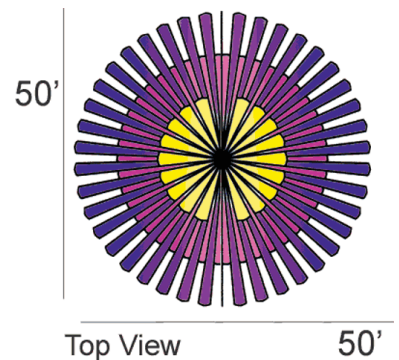

Note: Specifications may change without notice