



LOS2400/120



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

360° view Super Ceiling Sensor with integral 20 amp power pack. No extra wires to run or extra boxes to install. Covers 2000 sf @ 9' height. LED detection indicator.

SPECIFICATIONS

Easy Installation:

Relay and sensor all in one reduces installation cost. Compatible with dimmers and electronic ballasts. LED testing and operation indicator.

Maximum Reliability:

Adjustable detector sensitivity for superior detection.

Maximum Versatility:

Adjustable time delay. Sensor detection pattern can be customized. No minimum load requirement. Can be wired in parallel.

UL Listing:

For indoor applications. Tuff Dome & Smart Box are UL Listed for wet locations.

>Time Sensitivity

Adjustments: -/SPECTITLEDetection:

360° view Super Ceiling Sensor

Coverage Area:

2000sf @ 9'

Detection:

360° view Super Ceiling Sensor

Fluorescent Watts Switched:

2400 watts

Incandescent Watts Switched:

2400 watts

Manual Switch:

Override key

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

Power Consumption:

Negligible

Ratings Amps Horsepower:

20 amps 1 horsepower

Time Delay:

6 to 15 minutes


Color:

White


Weight:

0.5

DIMENSIONS

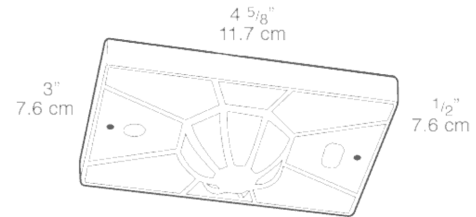

DETECTION PATTERN

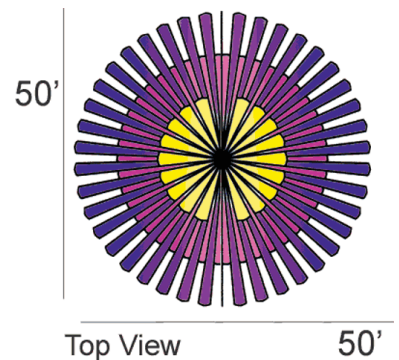

Note: Specifications may change without notice