


RL20

4" Line Voltage Mini-Recessed Housing, New Construction

Catalog No. _____

Type _____

Project _____

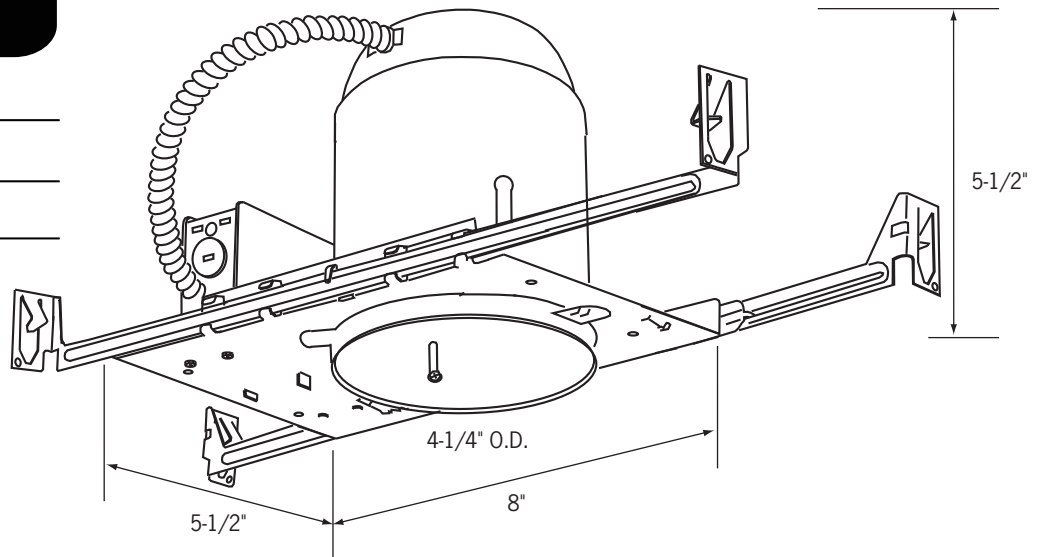

Ceiling Opening: 4-3/4"
Plaster Frame: 8" x 5-1/2"

Specifications/Features

Housing

Compact 4" incandescent downlight housing for new construction applications; may be used with drywall, plaster or suspended ceilings, 1/2" to 1-1/2" thick.

The standard new construction housing may be used in insulated ceilings if a minimum 3" distance is maintained all around fixture from insulation material.

Nailer bar hangers for easy installation, integral holding spikes for convenient mounting.

Dual extension bars adjustable for 16" and 24" center joists.

Hanger bars may be extended to rest on T-bar ceilings. Optional clip-on T-bar hangers are also available.

Lamp/Electrical

(1) 50W R20, 50W PAR20 or 45W PAR16 max.

Prewired junction box with spring-latch access plates.

Approved for through-circuit wiring. Max (8) #12 AWG (4-in/4-out).

Adjustable lamp socket – vertical position.

Thermally protected.

Junction box has (4) 1/2" pry-outs, (1) 3/4" concentric pry-out and (4) Romex pry-outs.

Trims

Many different trims are available to complement any design style. See attached "Trims for 4" Line voltage Mini-Recessed Housings" spec sheet for details.

Warranty

This fixture is covered by Con-Tech's full one year replacement guarantee after date of purchase.

Listing

cULus listed. Suitable for damp locations.

New York City approved. Calendar number 38645.

Ordering Information

Example Order:

RL20-CP

CTR200-P

Housing

RL20 - New Construction
Mini-Recessed Housing
RL20-CP - Chicago Plenum
New Construction
Mini-Recessed Housing

Trims

**For Trims, see attached "Trims for
4" Line Voltage Mini-Recessed
Housings" spec sheet.**

Options

HB-30 - T-Bar Hanger Set



1-800-728-0312

www.con-techlighting.com

All specifications subject to change without notice.

Trims for 4" Line Voltage Incandescent Mini-Recessed Housings

Catalog No. _____

Type _____

Project _____


General Trim Information

All trims are compatible with 4 Inch Line Voltage Incandescent Mini-Recessed Housings.

All trims have white trim finish unless specified.

All trims are cULus listed.

All trims are suitable for damp locations; only shower trims are listed for wet locations.

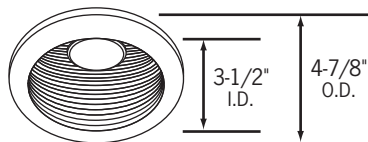


CTR2001-P

Black Baffled Downlight

CTR2001W-P

White Baffled Downlight


All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton).

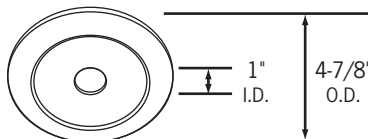

CTR2005-P

Mini-recessed Pin Spot


All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton). Aluminum reflector.

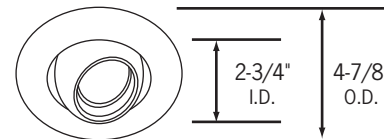

CTR2008-(P, U)

Mini-recessed Eyeball

30° vertical adjustment. All steel construction. (3) heat treated spring steel mounting clips.

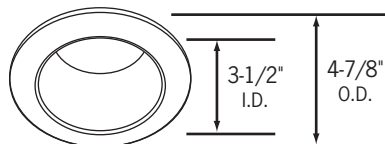

CTR2002-BLK-B

Black Specular Aluminum Reflector

CTR2002-BLK-P

Black Specular Aluminum Reflector

CTR2002-CLR-P

Clear Specular Aluminum Reflector


CTR2002-GLD-P

Gold Specular Aluminum Reflector

CTR2002-WHT-P

White Specular Aluminum Reflector


All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton).

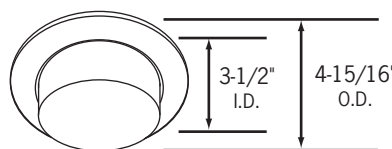

CTR2006-P

Drop Opal Glass Shower Light


All steel construction. (3) heat treated spring steel mounting clips. 1/8" thick heavy duty polyethylene sponge gasket. Wet location listed. 35W PAR20 maximum lamp.

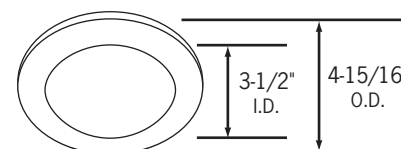

CTR2012-P

Flat Alabite Glass Lens Shower Light


All steel construction. (3) heat treated spring steel mounting clips. 1/8" thick heavy duty polyethylene sponge gasket. Wet location listed. 35W PAR20 maximum lamp.

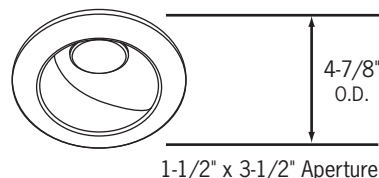

CTR2003-P

Mini-recessed Scoop Wall Wash

All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton).

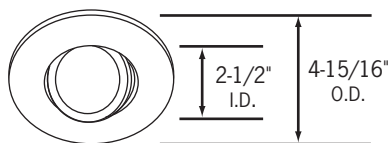

CTR2007-(P, B, NK, PB, S)

Surface Adjustable

28° vertical adjustment. All steel construction. (3) heat treated spring steel mounting clips. Lamp retaining sweep spring clip. 50W PAR20 maximum lamp.

Reflector/Trim Finishes

Reflector Finish Options:

- CLR - Clear, Specular
- GLD - Gold, Specular
- BLK - Black, Specular
- WHT - White Light, Specular

Trim Finish Options:

- B - Black
- NK - Nickel
- P - White
- PB - Polished Brass
- S - Silver
- U - UNLook



1-800-728-0312

www.con-techlighting.com

All specifications subject to change without notice.