


**INDOOR • LED SHELF, COUNTER & CABINET ACCENT
H-RH49L-12V**

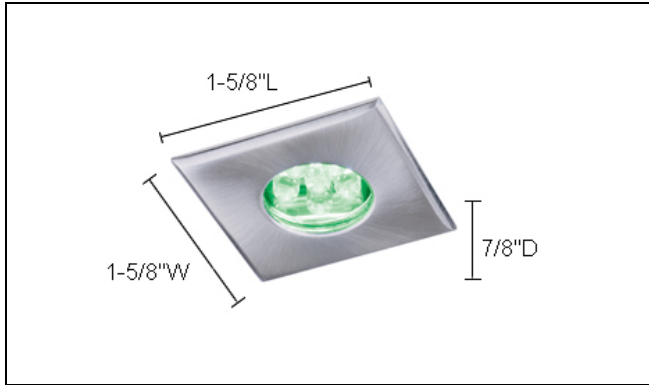

SPECIFICATIONS

Location Rating	Indoor
Trim	Stainless Steel 1-5/8" Square
Housing	Stainless Steel 7/8"D
Cut-Out	1-1/4" Ø
LED Lamps Used	6 Lamps (0.06 W each)
Total Wattage	0.36 W
Operating Voltage	12V
Beam Angle	25°
Average Operating Life	30,000 hours – 30, 60, G, B 50,000 hours – R, Y
Weight	0.125 Lbs
Carton Size	2-1/2" x 2-1/2" x 2-1/2"

ORDERING INSTRUCTIONS

Example: MODEL - VOLTAGE - COLOR OUTPUT
 H-RH49L - 12V - 30

DESCRIPTION

- Recessed mounting springs – no tools required.
- Includes 18" lead wire with Bi-Pin snap-together AMP connector.
- Narrow beam-spread maximizes light output for accent lighting applications.
- Depth of less than 1" allows easy recessed installation in a variety of shelving.
- For interior applications such as display counters and cabinets.
- Suitable for wine galleries and other display elements in homes and restaurants.

LISTING:
C-UL Listed

INSTALLATION

Cut hole in desired location 1-1/4" Ø. Press down on tension springs, slide into cut hole and release the springs. Tension will create a tight hold.

COLOR OUTPUT

R – Red	627nm = 26 lm/W
G – Green	530nm = 32 lm/W
B – Blue	470nm = 11 lm/W
Y – Yellow	590nm = 21 lm/W
30 – Warm White	3000K = 27 lm/W
60 – Cool White	6000K = 33 lm/W

ACCESSORIES

TRANSFORMERS


TRANS300MA	LED Driver (3.6 Watts)
TRANS500MA	LED Driver (6 Watts)
TRANS700MA	LED Driver (8.4 Watts)

HARNESSES

HARNES2-ID	2-Light Harness
HARNES3-ID	3-Light Harness
HARNES5-ID	5-Light Harness
HARNES7-ID	7-Light Harness

CONNECTING CABLES

CONNECT1-24-ID	24" Plug-in Connecting Cable
CONNECT1-36-ID	36" Plug-in Connecting Cable

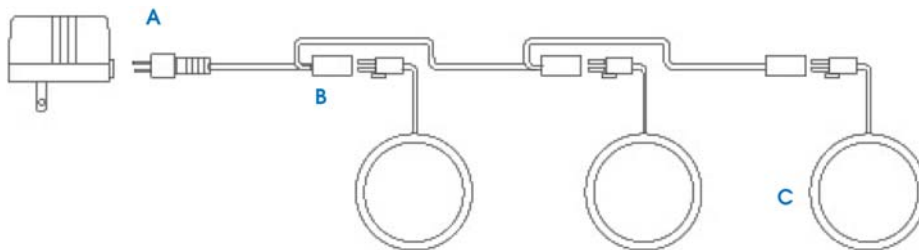

A. Transformer
B. Harness
C. Fixture

SUBMITTAL

Job Name:	Date:
Specification Type:	Job Location:
Drawing Location of Fixture Type:	Approval:
Specifier Name:	Sales Agency Contact:
Contact Phone/Email:	Contact Phone/Email:



JESCO
LIGHTING GROUP

JESCO LIGHTING GROUP
6625 TRAFFIC AVE
GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM


Specifications subject to change without prior notice.

**INDOOR • LED SHELF, COUNTER & CABINET ACCENT
H-RH49L-12V**


ACCESSORIES – HARNESES




HARNESS2-ID:
2-Light Harness
95" Cable with AMP Connectors
Fixture Spacing: 47-1/2"
Lead: 47-1/2"

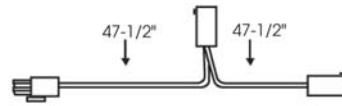


HARNESS3-ID:
3-Light Harness
131" Cable with AMP Connectors
Fixture Spacing: 35-1/2"
Lead: 60"



HARNESS5-ID:
5-Light Harness
202" Cable with AMP Connectors
Fixture Spacing: 35-1/2"
Lead: 60"




HARNESS7-ID:
7-Light Harness
266" Cable with AMP Connectors
Fixture Spacing: 38"
Lead: 38"



ACCESSORIES – TRANSFORMERS




TRANS300MA:
300MA Transformer to power up to 3.6 Watts 16' Lead



TRANS500MA:
500MA Transformer to power up to 6 Watts 32' Lead



TRANS700MA
700MA Transformer to power up to 8.4 Watts 16' Lead




ACCESSORIES – CONNECTING CABLES



CONNECT1-24-ID:
24" Connecting Cable



CONNECT1-36-ID:
36" Connecting Cable



SUBMITTAL

Job Name:	Date:
Specification Type:	Job Location:
Drawing Location of Fixture Type:	Approval:
Specifier Name:	Sales Agency Contact:
Contact Phone/Email:	Contact Phone/Email:



JESCO
LIGHTING GROUP

JESCO LIGHTING GROUP
6625 TRAFFIC AVE
GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM

Specifications subject to
change without prior notice.