


**LOW VOLTAGE MONORAIL
QUICK ADAPT SPOTS • QAS 102**

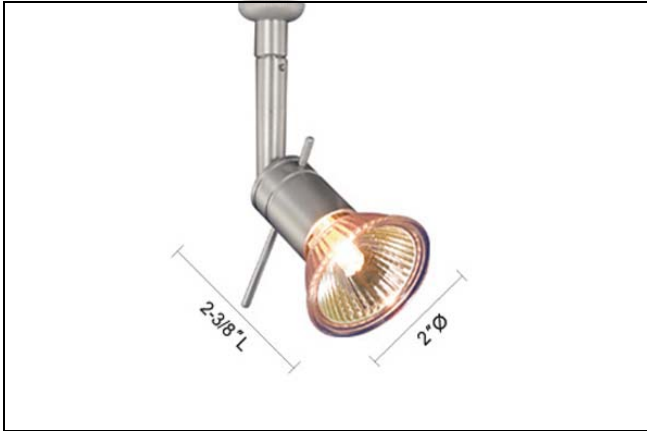

CATALOG INFORMATION

MODEL	LAMP	MAX WATT	STEM LENGTH	DIMENSIONS	FINISH
QAS 102	MR16-Lens 12V/24V	50W	X3 – 3" X6 – 6"	2"Ø x 2-3/8"L	SN – Satin Nickel

Ordering Instructions
Example: MODEL LENGTH – SOCKET
 QAS 102 X3 – SN

DESCRIPTION

- Quick Adapt Spot includes a Quick Adapt Jack, and MR16 12V 50W lamp.
- May be used with Jesco Monorail Systems, Standard Track Systems, or with Monopoint/Multipoint Systems – See COMPATIBLE SYSTEMS.

LAMPING:

MR16-Lens 12V 50W included.
 Optional: 24V lamp, requires appropriate power supply (not supplied).

AIMING:

90° vertical and 360° rotation.

LISTING:


ETL Listed.

COMPATIBLE SYSTEMS



MONORAIL SYSTEM

The Monorail Fixture Adapter MA-FA (sold separately) provides the connection between the Quick Adapt Spot to the Monorail.



STANDARD TRACK SYSTEM

The Standard Track Adapter MA-TA-H (sold separately) enables the use of Quick Adapt Spots in Standard, Line Voltage H-Track Systems. Includes a 50W electronic transformer. Dimmable with an electronic or standard incandescent dimmer.



MONOPOINT / MULTIPOINT SYSTEM

Quick Adapt Spots may be directly mounted onto Monopoint or Multipoint canopies, which have built-in or remote transformer options.

SUBMITTAL

Job Name:	Date:
Specification Type:	Job Location:
Drawing Location of Fixture Type:	Approval:
Specifier Name:	Sales Agency Contact:
Contact Phone/Email:	Contact Phone/Email:

Specifications subject to change without prior notice.



JESCO LIGHTING GROUP
 66-25 TRAFFIC AVE
 GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM