

# EZHH150PSQ



JOB NAME: \_\_\_\_\_  
DATE: \_\_\_\_\_  
TYPE: \_\_\_\_\_

## DESCRIPTION

Versatile MH Floodlight with hinged lens frame and hydroformed reflector. Field adjustable vertical and horizontal lamp positions. Lamp supplied.

## SPECIFICATIONS

### Finish:

Chip and fade resistant polyester powder coat finish

### Ground Mounting:

Use the new MPM19 PVC Mighty Post with aluminum cap for sturdy installation

### Housing:

Precision die cast aluminum. 1/2" NPS threaded arm with locking swivel

### Lens Frame:

Precision die cast aluminum. Hinged for easy access

### Lens Gasket:

High temperature tubular silicone set in die cast retaining groove remains in place during relamping.

### Reflector:

Hydroformed aluminum. Field adjustable vertical or horizontal

### Socket:

Porcelain 4kv Pulse Rated socket with nickel plated screw shell

### UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground

### EPA:

0.6

### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

### Pulse Start:

Pulse Start metal halide for increased lamp life, lumen maintenance, color uniformity and efficiency


### Color:

Bronze

### Weight:


13.98

## DIMENSIONS

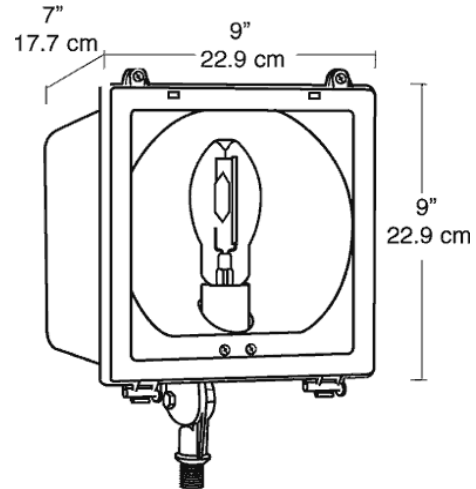

## PHOTOMETRIC

150w HPS @ 10' Mounting Height  
Aimed 30° below horizontal

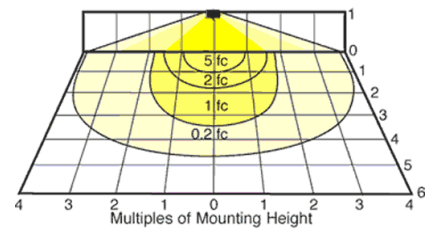

Mounting Height	Multiplier	Watts	Multiplier HPS	Multiplier MH
8'	1.6	175	.9	
10'	1.0	150PS	1.0	
12'	.7	150	1.0	.8
16'	.4	100	.6	.6
20'	.3	70	.4	.4
		50	.3	.2
		35	.2	

## ORDERING INFORMATION

Metal Halide Lamp supplied with fixture	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
	150	ED17	Medium	HX-HPF QT	1.4/1.7	.8/1.0	.7/8	.6/7	190	M102	14000	15000

**Factory Installed Options**  
Add suffix to Catalog Number

Swivel Photocontrol wired for 120V (/PCS)      Dual Tap works with 120 / 277 volts (/DT)  
Quad Tap works with 120, 208, 240 and 277 volts (/QT)      Single Tap Photocontrol wired for 120V (/PC)

Note: Specifications may change without notice