

HALO®




H5T

5" Aperture
Non-IC Housing
120V Line Voltage

RECESSED DOWNLIGHTING

- Thermally Protected Non-IC Housing.
- May be used in insulated ceilings but insulation MUST be kept 3" away from all sides of housing.
- For use with 120V Incandescent lamps.
- H5TM in Canada

DIMENSIONS

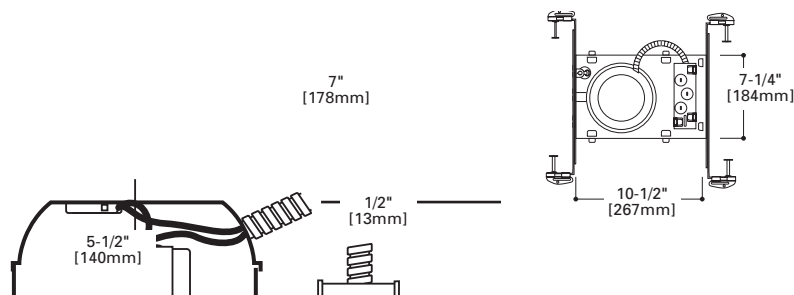

DESCRIPTION

The Halo H5 series utilizes a 5" aperture designed to use smaller sized PAR20 and PAR30 halogen lamps. The wide variety of trims available allows a number of different lighting effects to be created with one basic housing. The 5" trim size makes the H5 series the right choice for applications where dramatic yet inconspicuous lighting is required. If fixture is used in insulated ceilings, insulation MUST be kept 3 inches from all sides of fixture.

Housing

Die-stamped 22 gauge CRS with white powder coat finish. Housing accommodates a wide range of Halo 5" trims. Torsion springs on all trims for quick and easy installation.

Plaster Frame

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

Plaster frame features include:

- Regressed locking screw for securing hanger bars
- Cutouts for easily crimping hanger bars in position
- Halo embossed on plaster frame

Slide-N-Side™ Junction Box

- UL Listed for through branch circuit wiring (maximum 8 No.12 ga., 90°C conductors).
- 1/2" trade size conduit knockouts with true pry-out slots

positioned to accommodate straight conduit runs.

- Slide-N-Side™ wire traps allow non-metallic sheathed cable to be installed without tools and without removing knockouts. Accepts a wide range of non-metallic sheathed cable.
- Allows wiring connections to be made outside the junction box
- Simply insert the cable directly into the trap after connections are made.
- Accommodates the following standard non-metallic sheathed cable sizes:

(US) #14/2, #14/3, #12/2, #12/3
(Canada) #14/2, #14/3, #12/2

GOT NAIL! Pass-N-Thru™ Bar Hangers.

- Pre-installed nail easily installs in regular lumber, engineered lumber and laminated beams.
- Score lines allow "toolless" shortening for 12" joists.
- Bar hangers can be repositioned 90° on plaster frame
- Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary.
- Automatic levelling flange aligns the housing and lets you hold the housing in place with one hand while driving nails.
- Housing can be positioned at any point within 24" joist span
- Pass-N-Thru™ feature allows

bar hangers to be shortened without removing from plaster frame.

- Integral T-bar clip snaps onto T-bars - no additional clips required.

Socket

Porcelain socket with nickel plated brass screw shell, snaps into trim for consistent lamp positioning. Shipping insert protects socket from overspray.

Trims

- Housing accommodates a wide range of Halo 5" trims. Torsion springs on all trims for quick and easy installation.
- Fixed socket bracket aligns socket for consistent lamp position.

Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or incorrect application of insulation material.


Labels

- UL/cUL listed for damp location
- UL/cUL listed for Feed Through
- IP Rated

5020 Reflector Cone

- Straight Precision Sided Trim Ring
- Torsion Springs pull trim tight to ceiling
- Dual Socket Position for BR and PAR lamps
- Lamps

H5T H5RT	65W BR30, 75W R30, 75W PAR30
---------------------------	---------------------------------



5020P
White Trim with White Reflector

5020H
White Trim with Haze Reflector


5020SC
White Trim with Clear Specular Reflector



5020SN
Satin Nickel Trim with Satin Nickel Reflector

5020BL
White Trim with Black Specular Reflector

5020RG
White Trim with Gold Reflector




5020TBZ
Tuscan Bronze with Tuscan Bronze Reflector

5020AC
Antique Copper with Antique Copper Reflector

5021 Full Reflector

- Straight Precision Sided Trim Ring
- Torsion Springs pull trim tight to ceiling
- For use with A-Lamps
- Lamps:

H5T H5RT	60W A19
---------------------------	---------



5021RG
White Trim with Gold Reflector

5021H
White Trim with Haze Reflector

5021SC
White Trim with Clear Specular Reflector

OT500P Oversize Trim Ring

- Fits the new H5 trim family "Precision style" trim rings
- Oversize trim ring corrects for uneven ceiling cutout
- Adds 3/8" onto the trim flange
- Satin White plastic Ring




OT500P
Oversize Trim Ring for Straight precision sided H5 family trim

H5T **H5RT**

5001
Metal Baffle Splay

- Straight Precision Sided Trim Ring
- Torsion Springs pull trim tight to ceiling
- Dual Socket position For use with R and PAR Lamps
- Lamps

H5T	50W R20, 50W PAR20,
H5RT	65W BR30, 75W R30, 75W PAR30



5001SN
Satin Nickel Trim with Satin Nickel Baffle

5001MB
White Trim with Black Baffle

5001P
White Trim with White Baffle




5001TBZ
Tuscan Bronze Trim with Tuscan Bronze Baffle

5001AC
Antique Copper Trim with Antique Copper Baffle

5010
Step Baffle

- Straight Sided Trim Ring
- Torsion Springs pull trim tight to ceiling
- Dual Socket Position for BR and PAR Lamps
- Lamps:

H5T	65W BR30, 75W R30,
H5RT	75W PAR30



5010SL
Silver Trim with Black Baffle


5010W
White Trim with White Baffle

5010
White with Black Baffle

5012
High Coilex Baffle

- Straight Sided Trim Ring
- Provides ultra deep lamp regression (not compatible with H5TM)
- Lamps:

H5T	65W BR30, 75W R30,
H5RT	75W PAR30



5012W
White Trim with White Baffle

5012P
White Trim with Black Baffle

OT500P
Oversize Trim Ring

- Fits the new H5 trim family "Precision style" trim rings
- Oversize trim ring corrects for uneven ceiling cutout
- Adds 3/8" onto the trim flange
- Satin White plastic Ring




OT500P
Oversize Trim Ring for Straight precision sided H5 family trim

H5T

H5RT

5016
Coilex® Baffle with Reflector and Torsion Springs

- Straight Precision Sided Trim Ring
- Torsion Springs pull trim tight to ceiling
- Dual Socket Position for BR and PAR Lamps
- Lamps:




5016W
White Trim with White Baffle

5016P
White Trim with Black Baffle

H5T H5RT	60W A19, 65W BR30, 75W PAR30, 75W PAR30L, 75W R30
---------------------------	---

5060
Adjustable Gimbal - 25° Tilt

- Straight Sides Trim Ring
- For Directional Accent Lighting
- Torsion Springs pull trim tight to ceiling
- 25° Tilt - 360° Rotation
- Lamps:




5060P
White Trim with White Gimbal

H5T H5RT	75W PAR30
---------------------------	-----------

5070
Adjustable Eyeball - 30° Tilt

- Straight Precision Sided Trim Ring
- For Directional Accent Lighting
- Torsion Springs pull trim tight to ceiling
- 30° Tilt - 360° Rotation

H5T H5RT	75W PAR30
---------------------------	-----------



5070SL
Silver Trim with Silver Eyeball

5070PB
Polished Brass Trim with Polished Brass Eyeball

5070P
White Trim with White Eyeball




5070TBZ
Tuscan Bronze Trim with Tuscan Bronze Eyeball

5070AC
Antique Copper Trim with Antique Copper Eyeball

5070SN
Satin Nickel Trim with Satin Nickel Eyeball

5071
Adjustable Eyeball - 30° Tilt

- Straight precision Sided Trim Ring
- For Directional Accent Lighting
- Torsion Springs pull trim tight to ceiling
- 30° Tilt - 360° Rotation
- Lamps:



5071P
White Trim with White Eyeball

H5T H5RT	50W R20, 50W PAR20
---------------------------	--------------------

H5T

H5RT

5000

Splay Trim

- Open metal Splay Trim
- Dual position socket for BR and PAR lamps.
- Lamps:





5000AC
Antique Copper Trim and Antique Copper Splay

5000SN
Satin Nickel Trim and Satin Nickel Splay

5000P
White Trim and White Splay

H5T	65W BR30, 75W R30,
H5RT	75W PAR30



5000TBZ
Tuscan Bronze Trim and Tuscan Bronze Splay

5054

Shower Light

- Frosted glass dome shower light
- Wet location listed
- Non conductive, non corrosive polymer trim ring
- Lamps:




5054ACS
Antique Copper with Frosted Diffuser

5054SNS
Satin Nickel Trim with Frosted Diffuser

5054PS
White Trim with Frosted Diffuser

H5T	75W A19, 75W PAR30
H5RT	




5054TBZS
Tuscan Bronze with Frosted Diffuser

5051

Frosted Lens Shower Light

- Straight Precision Sided Trim Ring
- Frosted albalite lens
- Wet location listed for use in showers
- Lamps:



H5T	60W A19, 50W PAR30,
H5RT	50W PAR30L, 65W BR30




5051PS
White Trim with Frosted Lens

5030

Wall Wash with Baffle

- Designed to spread light close to the ceiling to eliminate the "cave effect"
- Provides a smooth even wash of light
- 360° rotation
- Lamps:



5030W
White Trim and Scoop, White Baffle

5030P
White Trim and Scoop, Black Baffle

H5T	50W TB19, 60W A19,
H5RT	60W BT15, 60W MB19