

DESCRIPTION



This contemporary vanity family features a 2 piece diffuser with a Oakley Bronze finish. Fixture is available in 2', 3', and 4' configurations using F14T5, F21T5 or F28T5 lamps. **(Lamps not Included)**

CONSTRUCTION

Housing is stamped of 20 gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not provided).


FINISH

This family features a plated Oakley Bronze finish.

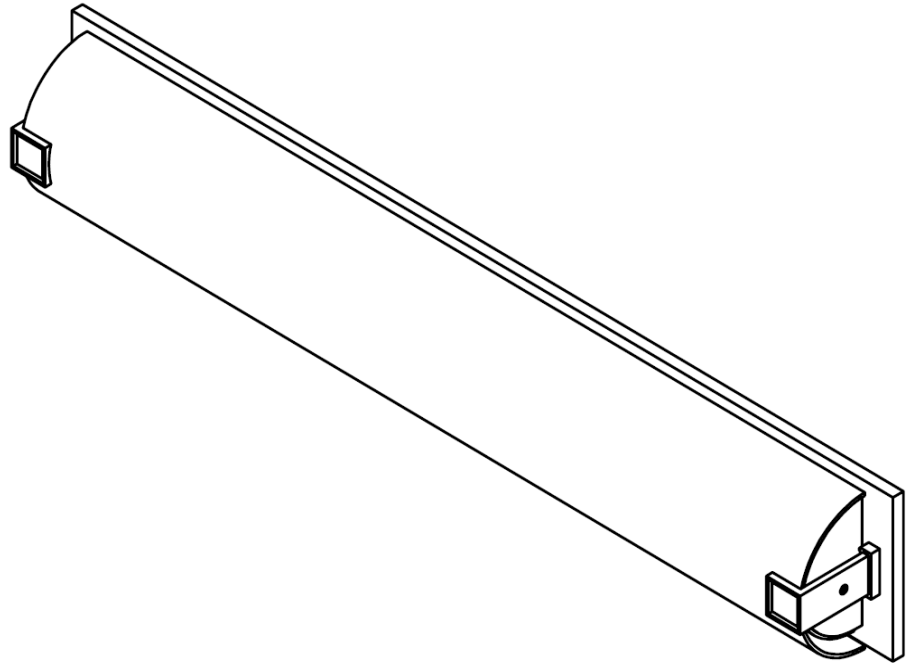

DIFFUSER

Front outer diffuser is clear glass and inner diffuser is a white acrylic. The diffuser assembly is secured to the front plate with an aluminum die cast brackets.

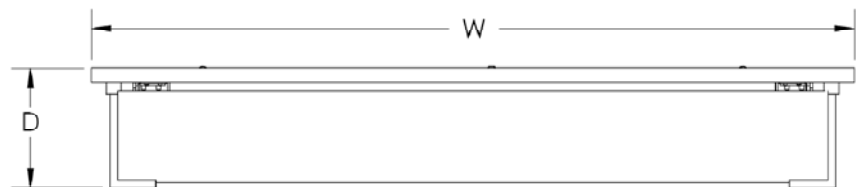

ELECTRICAL

These units are wired with an electronic ballast for (2) F14, F21 or F28 T5 lamps (not included): U.L. listed damp location. This sconce is equipped with a programmed rapid start 120 - 277volt, ±10%, 50 / 60hertz AC. Current crest factor <1.5 Ballast factor >.95 Nominal line amps .13 THD 10% Min. starting temp 0°F / -18°C Sound rated A No PCB's.

ORDERING INFORMATION

MODEL NUMBER	LAMP INFORMATION	DEPTH	WIDTH	HEIGHT
NLV214RBMV	(2) F14 T5 Linear	3 7/8"	25 1/2"	6 1/2"
NLV221RBMV	(2) F21 T5 Linear	3 7/8"	37 1/2"	6 1/2"
NLV228RBMV	(2) F28 T5 Linear	3 7/8"	49 1/2"	6 1/2"



2345 N Ernie Krueger Circle • Waukegan IL 60087
 PH: 847.249.5970 • FAX: 847.249.2618
 www.americanfluorescent.com

Limited Factory Warranty

American Fluorescent Corporation hereby warranty that this fixture is free from defects in materials and workmanship when installed and used under normal operating conditions for a period of 2 years from date of purchase. This warranty covers all component parts and extends only to replacement of defective fixture or components; it does not cover failure due to improper installation, misuse, mishandling or damage incurred in transit.